


Date
Customer
Project
Type

FFD_Marbul Surface Adjustable 109 3x LED 3000K DALI DI Donkey Grey Structure

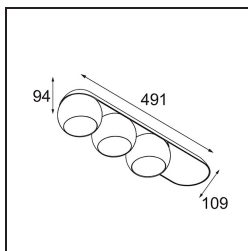

Specifications

Material	11502576
Light Source Type	LED
LED Type	CREE 1507
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	3
CIE flux code	100 100 100 100 88
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Input Voltage	230V
Luminaire power (W)	15.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	H 360° V 45°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Donkey Grey, Structure
Gross weight (g)	3347.0
Luminous flux per lamp (lm)	544
Efficacy (lm/W)	108
Glare rating	22

Marbul is a timeless, spherical accent luminaire. Its pure geometrical shape makes it easily fit in every interior. Why designers love it so? The attention to detail and the simplicity of the shape present a minimalistic, elegant and versatile design for those looking to experiment with organic lighting.


Remark

- 4000K on request
 - Magnetic reflector not included
 - 4000K on request
 - This is not a complete product. Magnetic reflector required.
 - This is not a complete product. Magnetic reflector required.
-

TM30 & CRI diagram



Light distribution & beam diagram

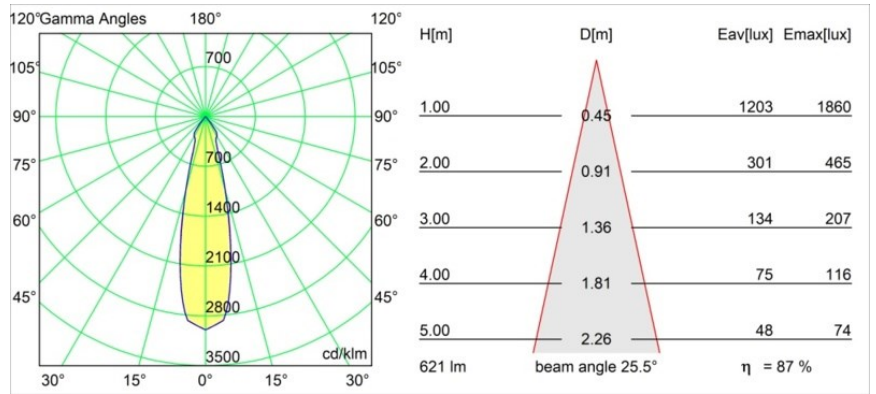

Optical Accessories

- **10216830** Reflector 82 Super Spot Aluminium Anodised
- **10216930** Reflector 82 Super Spot Champagne Anodised
- **10217030** Reflector 82 Super Spot Gold Anodised
- **10217130** Reflector 82 Medium Aluminium Anodised
- **10217230** Reflector 82 Medium Champagne Anodised
- **10217330** Reflector 82 Medium Gold Anodised
- **10217430** Reflector 82 Flood Aluminium Anodised
- **10217530** Reflector 82 Flood Champagne Anodised
- **10217630** Reflector 82 Flood Gold Anodised

- Choose a required accessory