
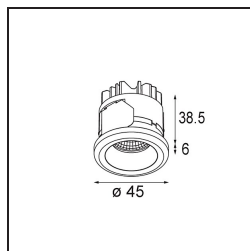


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Medard Recessed 42 1x IP55 LED 2700K Medium DE White Structure

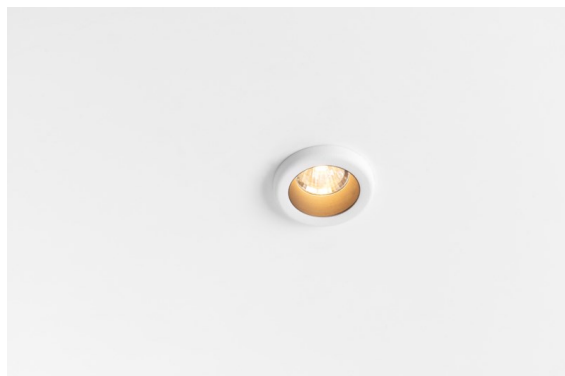

Specifications

| | |
|---------------------------------|----------------------------------|
| Material | 11550009 |
| Light Source Type | LED |
| LED Type | CREE 1304 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L90B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 76 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 24.0 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 55 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Recessed |
| Cut-out size (mm) | ø40 |
| Mounting depth (mm) | 65.0 |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 106.0 |
| Drive current (mA) | 350 500 |
| Min. forward voltage (Vf) | 7,5 7,8 |
| Max. forward voltage (Vf) | 9,5 9,8 |
| Connected load (W) | 3,0 4,4 |
| Luminous flux per lamp (lm) | 259 349 |
| Efficacy (lm/W) | 86 81 |
| Glare rating | 11 12 |

The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.


Remark

- 4000K on request
-

TM30 & CRI diagram



Light distribution & beam diagram

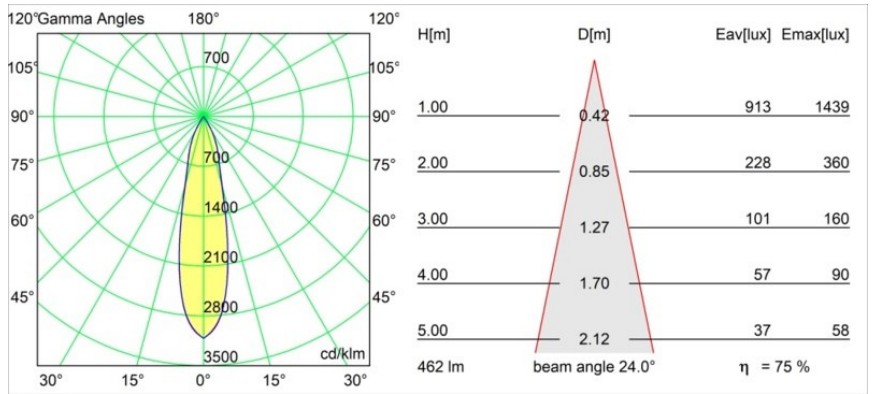

Diagrams

Installation Accessories



10889530 Installation Housing 123x100x80



12293130 Plaster Kit 100x120-40 1x

Choose a required accessory