MODULAR LIGHTING — INSTRUMENTS

| | |
|---|---|
| Date | |
| Customer | |
| Project | |
| Type | |

*Thimble Recessed 74 1x IP55 LED 2700K Medium DE Black Brushed Anodised*




Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

## Specifications

| | | |
|---|---|---|
| Material | 11620081 | |
| Light Source Type | LED | |
| LED Type | BRIDGELUX V6 HD G7 | |
| LED technology | LED COB | |
| CRI | Min. 90 | |
| Colour Temperature | 2700K | |
| Lifetime | L80B10 @50,000 Hours | |
| Lamp Included | Yes | |
| Number of Light Sources | 1 | |
| CIE flux code | 100 100 100 100 62 | |
| Binning (SDCM) | 2 | |
| Light Direction | Down | |
| Optic | Lens | |
| Measured beam angle (°) | 30.0 | |
| Input Voltage | Constant Current Driver Required | |
| Electrical Class | III | |
| IP Rating | 55 | |
| Glow wire rating (°C) | 960 | |
| Indoor/Outdoor | Indoor | |
| Application | Ceiling | |
| Mounting | Recessed | |
| Cut-out size (mm) | ø70 | |
| Mounting depth (mm) | 110.0 | |
| Adjustability | Not Applicable | |
| Distance to Lighted Object (m) | 0,1 | |
| Primary Colour & Primary Finish | Black, Brushed Anodised | |
| Gross weight (g) | 254.0 | |
| Drive current (mA) | 350 | 500 |
| Min. forward voltage (Vf) | 14,8 | 15,2 |
| Max. forward voltage (Vf) | 18,0 | 18,6 |
| Connected load (W) | 5,7 | 8,5 |
| Luminous flux per lamp (lm) | 438 | 591 |
| Efficacy (lm/W) | 77 | 70 |
| Glare rating | 0 | 0 |
| Remark | • 4000K on request | |

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-01-16, 12:47:02 PM - ©Modular Lighting Instruments

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-01-16, 12:47:02 PM - ©Modular Lighting Instruments

## *TM30 & CRI diagram*

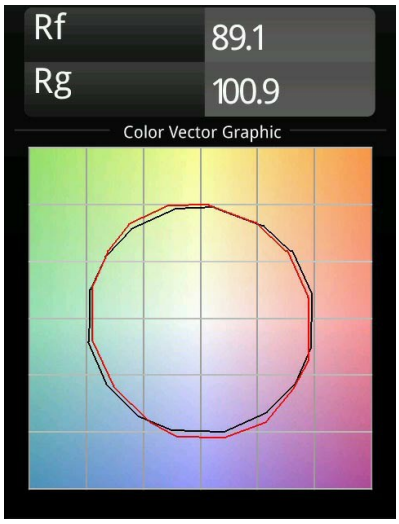


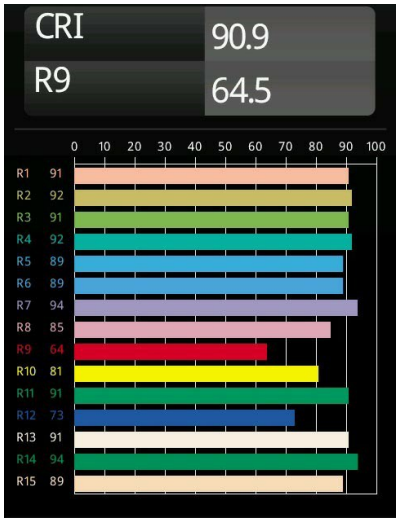


## *Light distribution & beam diagram*

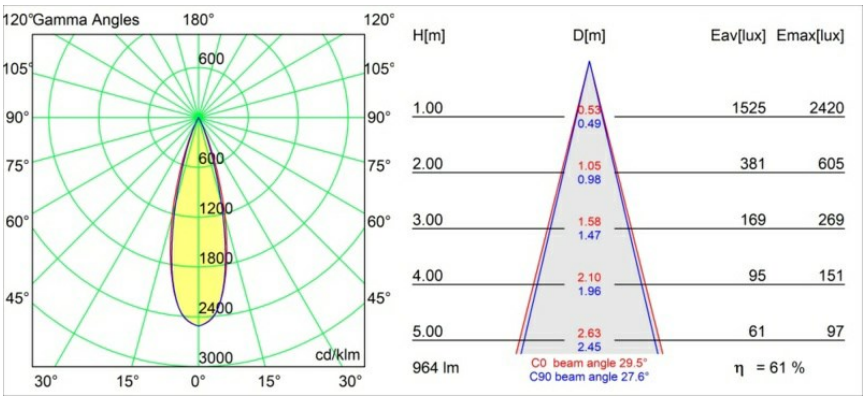


Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-01-16, 12:47:02 PM - ©Modular Lighting Instruments

## *Installation Accessories*




**11624030** Installation Housing 140x250x100x210




**12292630** Gypsum Fibreboard 150x150




**11624430** Concrete Ring 70 Standard Installation Housing




**11624330** Ring Recessed 70 1x




**12292430** Plaster Kit Trimless 150x150 - 70 1x

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-01-16, 12:47:02 PM - ©Modular Lighting Instruments




**11624230** Concrete Kit 70 150x150 1x

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-01-16, 12:47:02 PM - ©Modular Lighting Instruments