


Date	
Customer	
Project	
Type	

Thimble Recessed 74 1x IP55 LED 2700K Medium DE Bronze Brushed Anodised



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

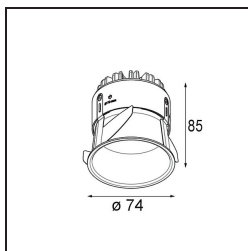

Specifications

Material	11620082	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G7	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 61	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Lens	
Measured beam angle (°)	30.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	ø70	
Mounting depth (mm)	110.0	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Bronze, Brushed Anodised	
Gross weight (g)	254.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	14,8	15,2
Max. forward voltage (Vf)	18,0	18,6
Connected load (W)	5,7	8,5
Luminous flux per lamp (lm)	438	591
Efficacy (lm/W)	77	70
Glare rating	0	0
Remark	• 4000K on request	




MODULAR
LIGHTING —
INSTRUMENTS

Thimble Recessed 74 lx IP55 LED 2700K Medium DE Bronze
Brushed Anodised

TM30 & CRI diagram




Light distribution & beam diagram

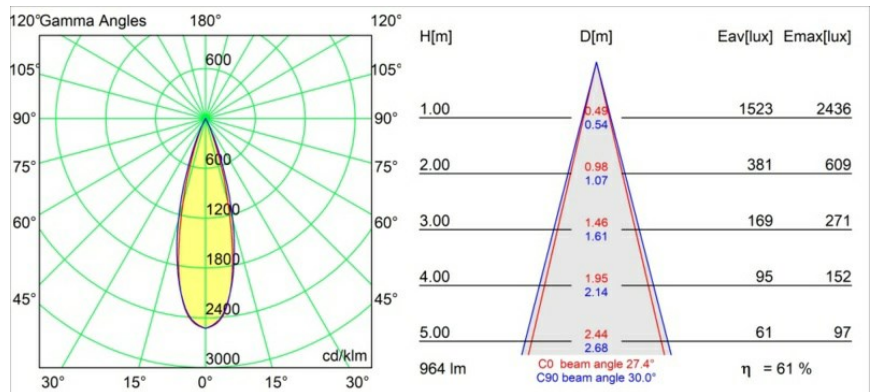


Installation Accessories




11624030 Installation Housing 140x250x100x210




12292630 Gypsum Fibreboard 150x150

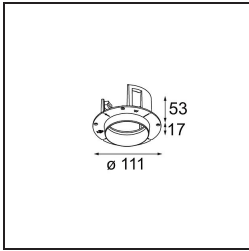


11624430 Concrete Ring 70 Standard Installation Housing



11624330 Ring Recessed 70 1x



12292430 Plaster Kit Trimless 150x150 - 70 1x

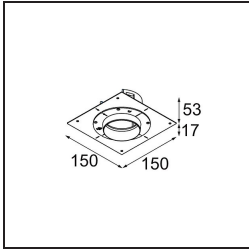

11624230 Concrete Kit 70 150x150 1x

Choose a required accessory