


Date
Customer
Project
Type

*Thimble Recessed Trimless 70 1x IP55 LED 3000K Medium DE Bronze Brushed Anodised*



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

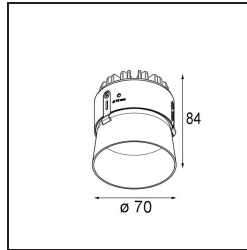


### Specifications


Material	11622182	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G7	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 61	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Lens	
Measured beam angle (°)	30.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	ø86 for plastered concrete ceilings, ø105 for false ceilings	
Mounting depth (mm)	110.0	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Bronze, Brushed Anodised	
Gross weight (g)	244.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	14,8	15,2
Max. forward voltage (Vf)	18,0	18,6
Connected load (W)	5,7	8,5
Luminous flux per lamp (lm)	447	603
Efficacy (lm/W)	78	71
Glare rating	0	0

Remark	• 4000K on request
--------	--------------------

TM30 & CRI diagram

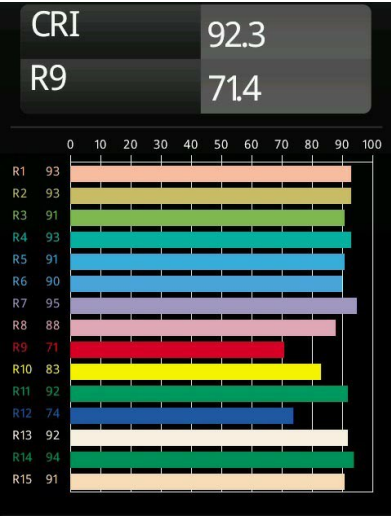

Light distribution & beam diagram

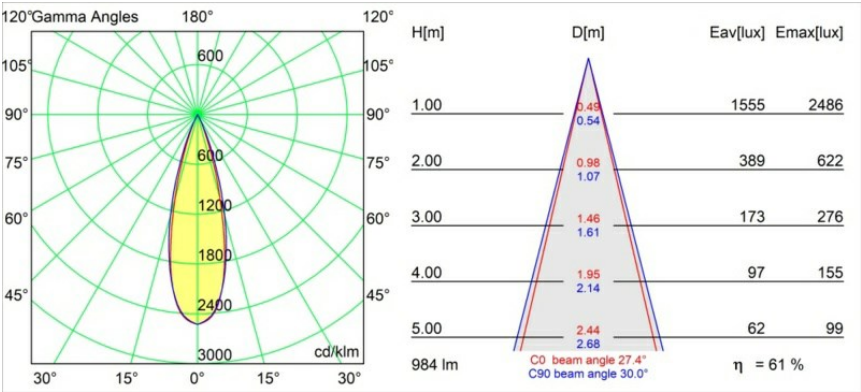

Diagrams


## Installation Accessories




**11624230** Concrete Kit 70 150x150 1x




**11624430** Concrete Ring 70 Standard Installation Housing

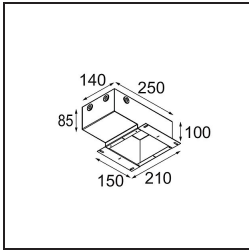


**11624030** Installation Housing 140x250x100x210



**12292630** Gypsum Fibreboard 150x150



**11624730** Ring Recessed Trimless 70 1x

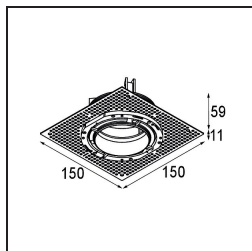

■ **12293630** Plaster Kit Trimless 150x150 - 70 1x

■ Choose a required accessory