


Date
Customer
Project
Type

*Thimble Recessed Trimless Adjustable 70 1x LED 2700K Medium DE Gold Brushed Anodised*

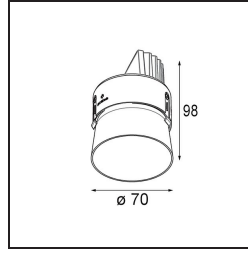

**Specifications**

Material	11623042
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 61
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	30.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø86 for plastered concrete ceilings, ø105 for false ceilings
Mounting depth (mm)	110.0
Adjustability	H 360° V 30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Gold, Brushed Anodised
Gross weight (g)	199.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	14,8      15,2
Max. forward voltage (Vf)	18,0      18,6
Connected load (W)	5,7      8,5
Delivered lumens (lm)	437      590
Efficacy (lm/W)	77      69
Glare rating	0      0
Remark	• 4000K on request

Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.





**MODULAR**  
LIGHTING —  
INSTRUMENTS


*Thimble Recessed Trimless Adjustable 70 lx LED 2700K Medium  
DE Gold Brushed Anodised*

---

**TM30 & CRI diagram**

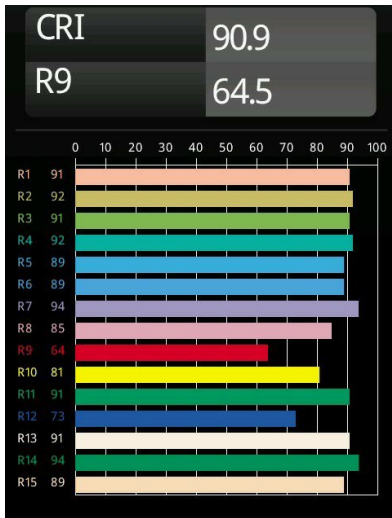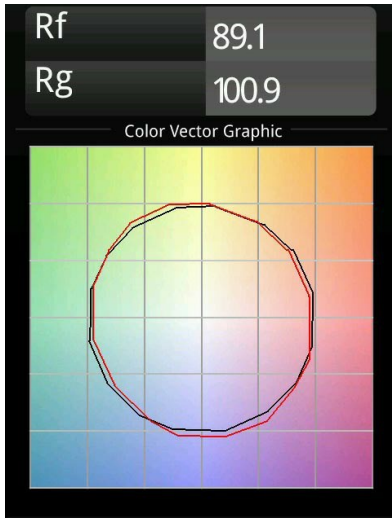


**Light distribution & beam diagram**

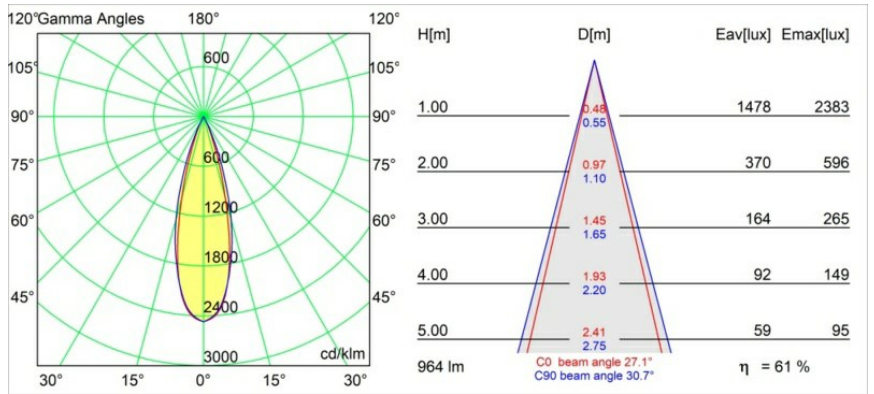


Diagrams


**Installation Accessories**

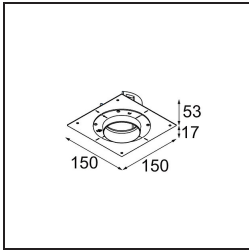


**11624230** Concrete Kit 70 150x150 1x




**11624430** Concrete Ring 70 Standard Installation Housing

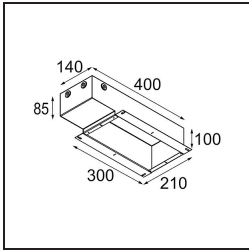


**11624130** Installation Housing 140x400x100x210




**11624030** Installation Housing 140x250x100x210




**12292630** Gypsum Fibreboard 150x150

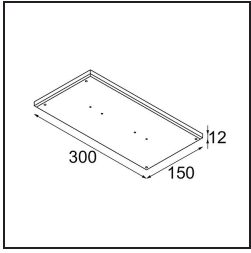


**12292730** FFD\_Gypsum fibreboard 300x150

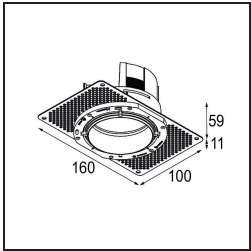


**11624530** Ring Recessed Trimless 70 lx

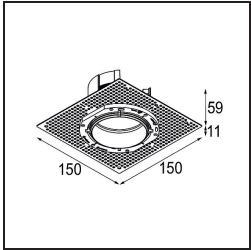

**11624630** Plaster Kit Trimless 150x150 - 70 lx

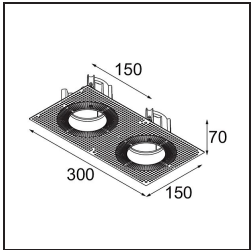

**12292530** Plaster Kit Trimless 300x150 - 70 lx

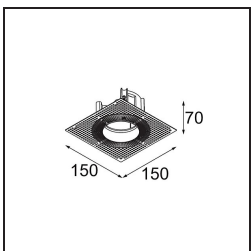

**12292430** Plaster Kit Trimless 150x150 - 70 lx

Choose a required accessory