


Date
Customer
Project
Туре

Thimble Recessed 74 1x IP55 LED 3000K Medium DE Gold Brushed Anodised



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.





a					r.								
Δ	\boldsymbol{n}	e	c	11	7.	c	a	Ŧ.	1	O	п	S	
\sim	ρ .	•	~	٠.)			90		4	~		~	

Specific divisions								
Material	11620142							
Light Source Type	LED							
LED Type	BRIDGELUX V6 HD G7							
LED technology	LED COB							
CRI	Min. 90							
Colour Temperature	3000K							
Lifetime	L80B10 @50,000 Hours							
Lamp Included	Yes							
Number of Light Sources	1							
CIE flux code	100 100 10	00 100 61						
Binning (SDCM)	2							
Light Direction	Down							
Optic	Lens							
Measured beam angle (°)	30.0							
Input Voltage	Constant C	Current Driver Required						
Electrical Class	III							
IP Rating	55							
Glow wire rating (°C)	960							
Indoor/Outdoor	Indoor							
Application	Ceiling							
Mounting	Recessed							
Cut-out size (mm)	ø70							
Mounting depth (mm)	110.0							
Adjustability	Not Applicable							
Distance to Lighted Object (m)	0,1							
Primary Colour & Primary Finish	Gold, Brus	hed Anodised						
Gross weight (g)	254.0							
Drive current (mA)	350	500						
Min. forward voltage (Vf)	14,8	15,2						
Max. forward voltage (Vf)	18,0	18,6						
Connected load (W)	5,7	8,5						
Luminous flux per lamp (Im)	447	602						
Efficacy (Im/W)	78	71						
Glare rating	0	0						
Remark	4000K on request							








TM30 & CRI diagram






Light distribution & beam diagram

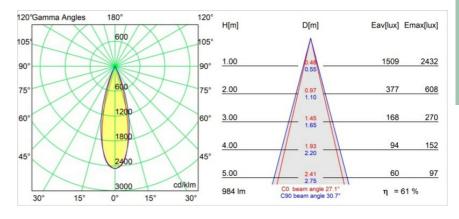





Installation Accessories




11624030 Installation Housing 140x250x100x210




12292630 Gypsum Fibreboard 150x150



11624430 Concrete Ring 70 Standard Installation Housing




11624330 Ring Recessed 70 1x



12292430 Plaster Kit Trimless 150x150 - 70 1x





11624230 Concrete Kit 70 150x150 1x

Choose a required accessory