


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Thimble Recessed 74 1x IP55 LED 3000K Medium DE Bronze Brushed Anodised



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

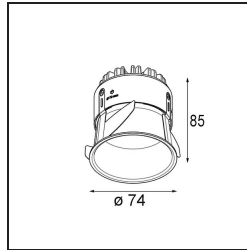

Specifications


| | | |
|---------------------------------|----------------------------------|------|
| Material | 11620182 | |
| Light Source Type | LED | |
| LED Type | BRIDGELUX V6 HD G7 | |
| LED technology | LED COB | |
| CRI | Min. 90 | |
| Colour Temperature | 3000K | |
| Lifetime | L80B10 @50,000 Hours | |
| Lamp Included | Yes | |
| Number of Light Sources | 1 | |
| CIE flux code | 100 100 100 100 61 | |
| Binning (SDCM) | 2 | |
| Light Direction | Down | |
| Optic | Lens | |
| Measured beam angle (°) | 30.0 | |
| Input Voltage | Constant Current Driver Required | |
| Electrical Class | III | |
| IP Rating | 55 | |
| Glow wire rating (°C) | 960 | |
| Indoor/Outdoor | Indoor | |
| Application | Ceiling | |
| Mounting | Recessed | |
| Cut-out size (mm) | ø70 | |
| Mounting depth (mm) | 110.0 | |
| Adjustability | Not Applicable | |
| Distance to Lighted Object (m) | 0,1 | |
| Primary Colour & Primary Finish | Bronze, Brushed Anodised | |
| Gross weight (g) | 254.0 | |
| Drive current (mA) | 350 | 500 |
| Min. forward voltage (Vf) | 14,8 | 15,2 |
| Max. forward voltage (Vf) | 18,0 | 18,6 |
| Connected load (W) | 5,7 | 8,5 |
| Delivered lumens (lm) | 447 | 603 |
| Efficacy (lm/W) | 78 | 71 |
| Glare rating | 0 | 0 |
| Remark | • 4000K on request | |




MODULAR
LIGHTING —
INSTRUMENTS

Thimble Recessed 74 lx IP55 LED 3000K Medium DE Bronze
Brushed Anodised


TM30 & CRI diagram

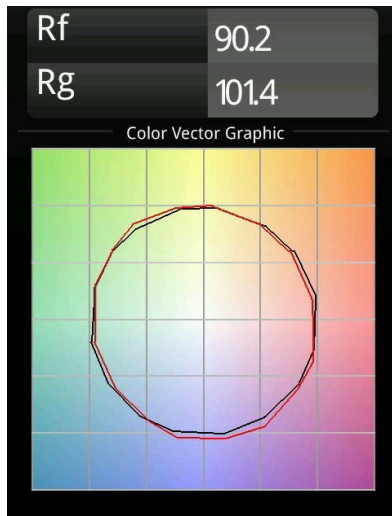


Light distribution & beam diagram

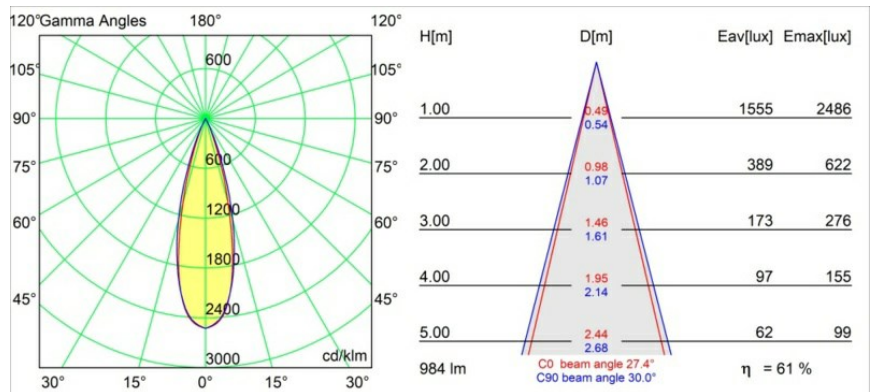


Installation Accessories

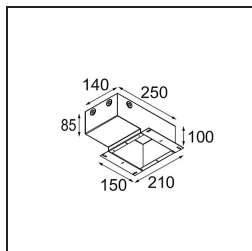


11624030 Installation Housing 140x250x100x210

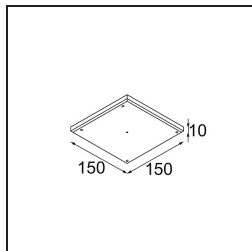


12292630 Gypsum Fibreboard 150x150

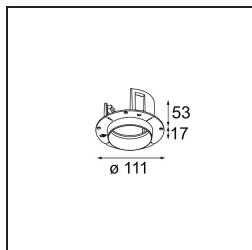

11624430 Concrete Ring 70 Standard Installation Housing

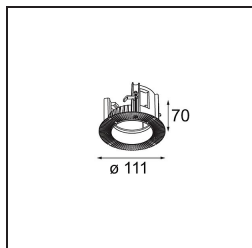

11624330 Ring Recessed 70 1x



12292430 Plaster Kit Trimless 150x150 - 70 1x

Choose a required accessory