


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Thimble Recessed Adjustable 74 1x LED 2700K Medium DE Black Brushed Anodised



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

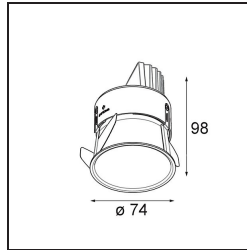

Specifications

| | |
|---------------------------------|----------------------------------|
| Material | 11621081 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G7 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 62 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Lens |
| Measured beam angle (°) | 30.0 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Recessed |
| Cut-out size (mm) | ø70 |
| Mounting depth (mm) | 110.0 |
| Adjustability | H 360° V 30° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Brushed Anodised |
| Gross weight (g) | 199.0 |
| Drive current (mA) | 350 500 |
| Min. forward voltage (Vf) | 14.8 15.2 |
| Max. forward voltage (Vf) | 18.0 18.6 |
| Connected load (W) | 5.7 8.5 |
| Delivered lumens (lm) | 438 591 |
| Efficacy (lm/W) | 77 70 |
| Glare rating | 0 0 |
| Remark | • 4000K on request |




MODULAR
LIGHTING —
INSTRUMENTS

Thimble Recessed Adjustable 74 lx LED 2700K Medium DE
Black Brushed Anodised

TM30 & CRI diagram




Light distribution & beam diagram

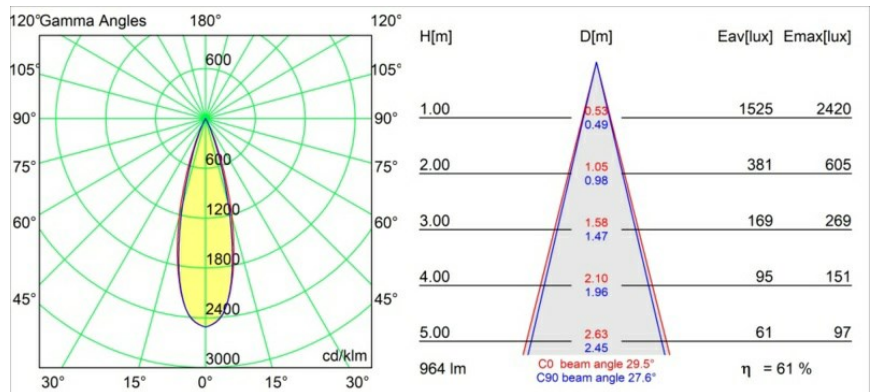


Installation Accessories




11624030 Installation Housing 140x250x100x210




11624130 Installation Housing 140x400x100x210

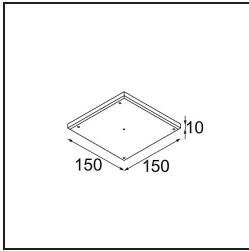


12292630 Gypsum Fibreboard 150x150



12292730 FFD_Gypsum fibreboard 300x150



11624430 Concrete Ring 70 Standard Installation Housing

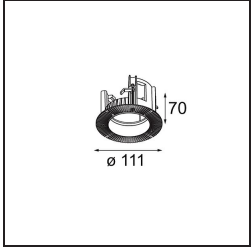

11624330 Ring Recessed 70 1x

Choose a required accessory