

Date
Customer
Project
Type

*Thimble Recessed Adjustable 74 1x LED 3000K Medium DE Gold Brushed Anodised*



**Specifications**

Material	11621142
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 61
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	30.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø70
Mounting depth (mm)	110.0
Adjustability	H 360° V 30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Gold, Brushed Anodised
Gross weight (g)	199.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	14,8      15,2
Max. forward voltage (Vf)	18,0      18,6
Connected load (W)	5,7      8,5
Luminous flux per lamp (lm)	447      602
Efficacy (lm/W)	78      71
Glare rating	0      0

Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

---


Remark

- 4000K on request
-

**TM30 & CRI diagram**



**Light distribution & beam diagram**

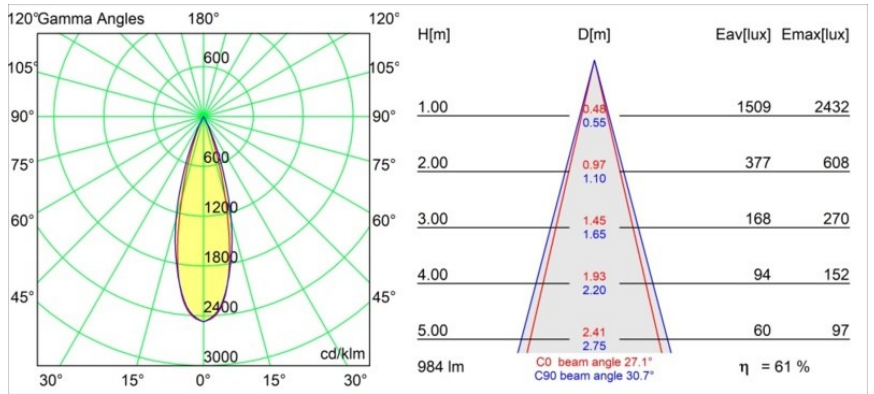

Diagrams

**Installation Accessories**



**11624030** Installation Housing 140x250x100x210



**12292630** Gypsum Fibreboard 150x150



**11624430** Concrete Ring 70 Standard Installation Housing



**11624330** Ring Recessed 70 1x



**12292430** Plaster Kit Trimless 150x150 - 70 1x



**11624230** Concrete Kit 70 150x150 1x

Choose a required accessory