


Date	
Customer	
Project	
Туре	

Thimble Recessed Trimless 70 1x IP55 LED 2700K Medium DE White Structure



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.



## Specifications

specifications			
Material	11622009		
Light Source Type	LED		
LED Type	BRIDGELUX V6 HD G7		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	100 100 100 100 62		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Lens		
Measured beam angle (°)	30.0		
Input Voltage	Constant C	Current Driver Required	
Electrical Class			
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø86 for plastered concrete ceilings, ø105 for false ceilings		
Mounting depth (mm)	110.0		
Adjustability	Not Applica	able	
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	244.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	14,8	15,2	
Max. forward voltage (Vf)	18,0	18,6	
Connected load (W)	5,7	8,5	
Delivered lumens (Im)	442	595	
Efficacy (Im/W)	77	70	
Glare rating	0	0	
Remark	• 4000K or	n request	






Diagrams

## TM30 & CRI diagram






## Light distribution & beam diagram

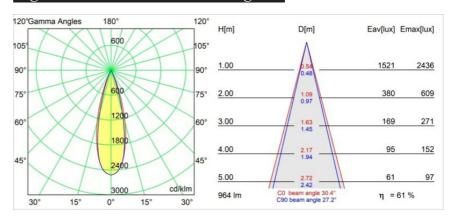




## Installation Accessories




11624230 Concrete Kit 70 150x150 1x




11624430 Concrete Ring 70 Standard Installation Housing



**11624030** Installation Housing 140x250x100x210




12292630 Gypsum Fibreboard 150x150



11624730 Ring Recessed Trimless 70 1x





**12293630** Plaster Kit Trimless 150x150 - 70 1x

Choose a required accessory