
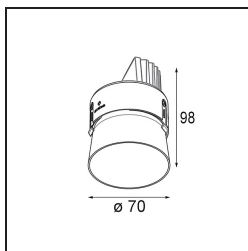


Date
Customer
Project
Type

Thimble Recessed Trimless Adjustable 70 1x LED 2700K Medium DE Silver Bronze Brushed Anodised

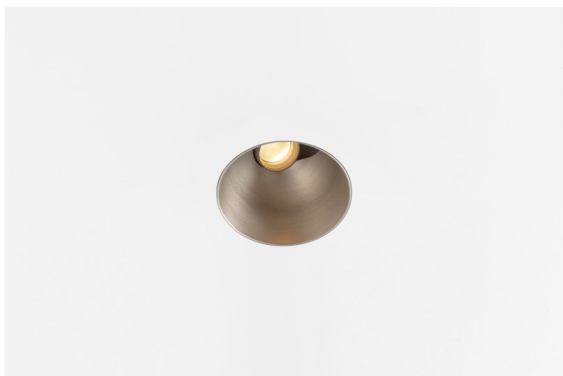

Specifications

Material	11623084
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 61
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	30.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø111
Mounting depth (mm)	110.0
Adjustability	H 360° V 30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Silver Bronze, Brushed Anodised
Gross weight (g)	199.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	14,8 15,2
Max. forward voltage (Vf)	18,0 18,6
Connected load (W)	5,7 8,5
Luminous flux per lamp (lm)	438 590
Efficacy (lm/W)	77 69
Glare rating	0 0

Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.


Remark

- 4000K on request
-

TM30 & CRI diagram



Light distribution & beam diagram

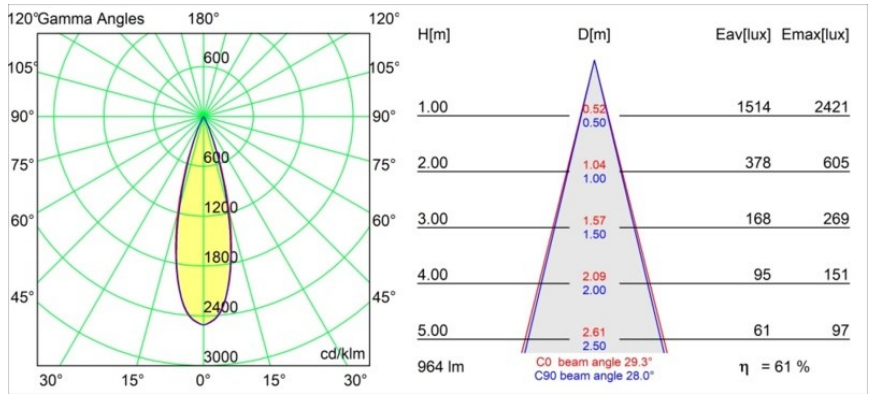

Installation Accessories



11624230 Concrete Kit 70 150x150 1x



11624430 Concrete Ring 70 Standard Installation Housing




11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150



12293630 Plaster Kit Trimless 150x150 - 70 1x

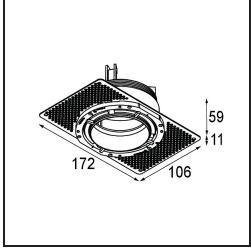

■ **11624730** Ring Recessed Trimless 70 1x

■ Choose a required accessory