

Thimble Recessed Trimless Adjustable 70 1x LED 3000K Medium DE White Structure



Specifications

Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

| | |
|---------------------------------|----------------------------------|
| Material | 11623109 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G7 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 62 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Lens |
| Measured beam angle (°) | 30.0 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Recessed |
| Cut-out size (mm) | ø111 |
| Mounting depth (mm) | 110.0 |
| Adjustability | H 360° V 30° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 199.0 |
| Drive current (mA) | 350 500 |
| Min. forward voltage (Vf) | 14.8 15.2 |
| Max. forward voltage (Vf) | 18.0 18.6 |
| Connected load (W) | 5.7 8.5 |
| Luminous flux per lamp (lm) | 451 608 |
| Efficacy (lm/W) | 79 72 |
| Glare rating | 0 0 |


Remark

- 4000K on request
-

TM30 & CRI diagram



Light distribution & beam diagram

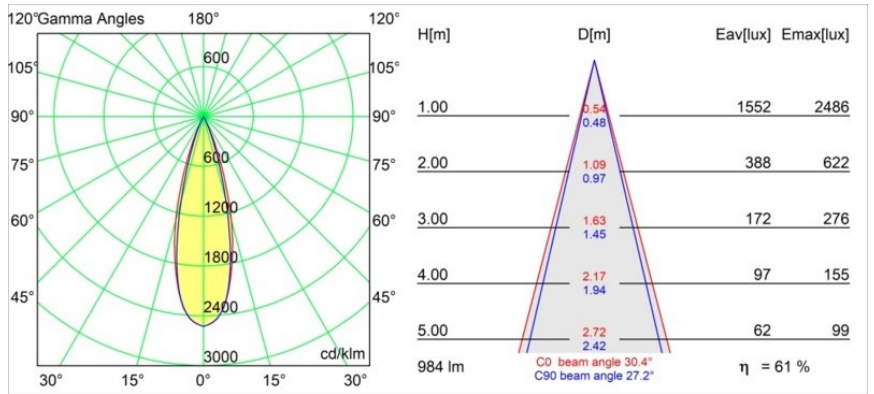

Diagrams

Installation Accessories




11624230 Concrete Kit 70 150x150 1x



11624430 Concrete Ring 70 Standard Installation Housing



11624030 Installation Housing 140x250x100x210

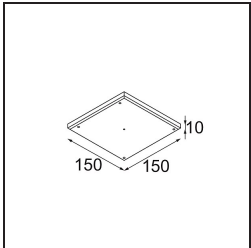

12292630 Gypsum Fibreboard 150x150



12293630 Plaster Kit Trimless 150x150 - 70 1x



■ **11624730** Ring Recessed Trimless 70 1x

■ Choose a required accessory