


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

*Thimble Recessed Trimless Adjustable 70 1x LED 3000K Medium DE Bronze Brushed Anodised*



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.





### Specifications

|                                 |                                  |      |
|---------------------------------|----------------------------------|------|
| Material                        | 11623182                         |      |
| Light Source Type               | LED                              |      |
| LED Type                        | BRIDGELUX V6 HD G7               |      |
| LED technology                  | LED COB                          |      |
| CRI                             | Min. 90                          |      |
| Colour Temperature              | 3000K                            |      |
| Lifetime                        | L80B10 @50,000 Hours             |      |
| Lamp Included                   | Yes                              |      |
| Number of Light Sources         | 1                                |      |
| CIE flux code                   | 100 100 100 100 61               |      |
| Binning (SDCM)                  | 2                                |      |
| Light Direction                 | Down                             |      |
| Optic                           | Lens                             |      |
| Measured beam angle (°)         | 30.0                             |      |
| Input Voltage                   | Constant Current Driver Required |      |
| Electrical Class                | III                              |      |
| IP Rating                       | 20                               |      |
| Glow wire rating (°C)           | 960                              |      |
| Indoor/Outdoor                  | Indoor                           |      |
| Application                     | Ceiling                          |      |
| Mounting                        | Recessed                         |      |
| Cut-out size (mm)               | ø111                             |      |
| Mounting depth (mm)             | 110.0                            |      |
| Adjustability                   | H 360° V 30°                     |      |
| Distance to Lighted Object (m)  | 0,1                              |      |
| Primary Colour & Primary Finish | Bronze, Brushed Anodised         |      |
| Gross weight (g)                | 199.0                            |      |
| Drive current (mA)              | 350                              | 500  |
| Min. forward voltage (Vf)       | 14,8                             | 15,2 |
| Max. forward voltage (Vf)       | 18,0                             | 18,6 |
| Connected load (W)              | 5,7                              | 8,5  |
| Luminous flux per lamp (lm)     | 447                              | 603  |
| Efficacy (lm/W)                 | 78                               | 71   |
| Glare rating                    | 0                                | 0    |




|        |                    |
|--------|--------------------|
| Remark | • 4000K on request |
|--------|--------------------|


### TM30 & CRI diagram

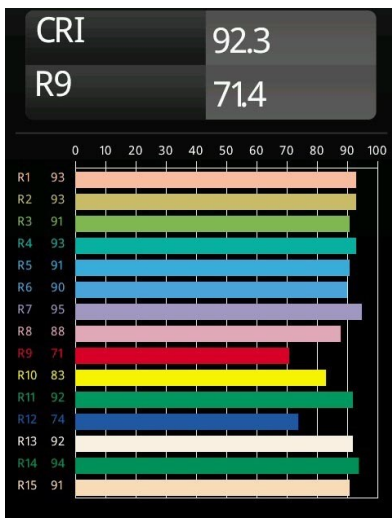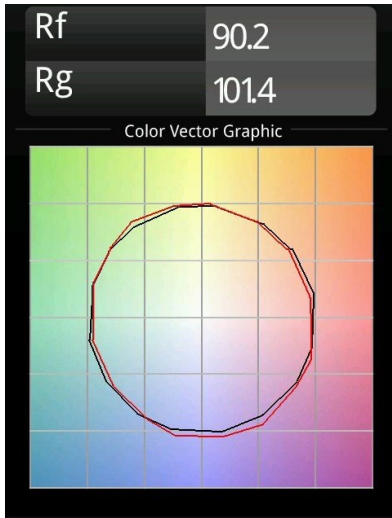


### Light distribution & beam diagram

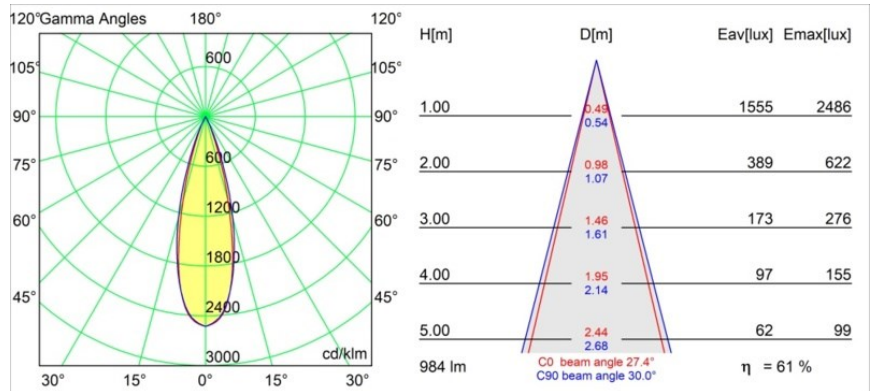


## Installation Accessories




**11624230** Concrete Kit 70 150x150 1x




**11624430** Concrete Ring 70 Standard Installation Housing




**11624030** Installation Housing 140x250x100x210



**12292630** Gypsum Fibreboard 150x150



**12293630** Plaster Kit Trimless 150x150 - 70 1x



■ **11624730** Ring Recessed Trimless 70 1x

■ Choose a required accessory