


Date
Customer
Project
Type

FFD_Chapeau Recessed Trimless Adjustable 222 1x LED 2700K Medium DE Black Structure

Chapeau's name was inspired by its top hat-like shape. But its tilting system is what really makes it stand out. Folded up in its shell, Chapeau becomes a downlighter. However, the bulb holder can also be tilted to produce a wall-wash effect. Available in a recessed application, with or without trim. Chapeau won the Good Design Award in 2012. So hats off to the designers, Couvreur & Devos!



Specifications


Material	11970132	
Light Source Type	LED	
LED Type	BRIDGELUX VERO13	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
Binning (SDCM)	3	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	24.3	
Input Voltage	Constant Current Driver Required	
Luminaire power (W)	36.0	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	223	
Mounting depth (mm)	175.0	
Adjustability	H 360° V 90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Gross weight (g)	2170.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	29.1	29.9
Max. forward voltage (Vf)	33.7	34.7
Connected load (W)	11.0	16.2
Delivered lumens (lm)	940	1290
Efficacy (lm/W)	85	80
Glare rating	16	17
Remark	<ul style="list-style-type: none"> • Recessed ring included • Recessed ring included 	



MODULAR
LIGHTING —
INSTRUMENTS

FFD_Chapeau Recessed Trimless Adjustable 222 lx LED 2700K
Medium DE Black Structure

TM30 & CRI diagram

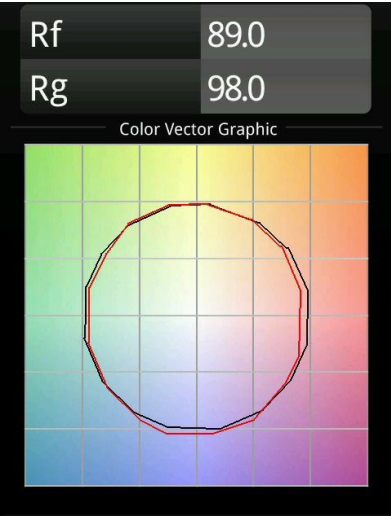

Light distribution & beam diagram

