


Date
Customer
Project
Type

FFD_Nomad Surface Adjustable 2x LED 3000K Flood DE Aluminium Matt





Like industrial design with a retro touch? Revisit Nomad. Now sporting tiny new drivers, and a LED unit that looks exactly like the luminaire's first halogen bulb, Nomad LED respects the original design to perfection. Available in versions with 2L and 4L light units, in white structure, black or aluminium, with or without integrated gear. The sweetheart of architects is back for your next project.




Specifications

Material	12023505		
Light Source Type	LED		
LED Type	BRIDGELUX VERO13 G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	2		
CIE flux code	95 99 100 100 85		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	41.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Surface		
Adjustability	GIMBLE 45°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Aluminium, Matt		
Gross weight (g)	1639.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	28,3	29,0	29,7
Max. forward voltage (Vf)	32,9	33,6	34,5
Connected load (W)	10,7	15,7	22,5
Delivered lumens (lm)	1251	1706	2232
Efficacy (lm/W)	117	109	99
Glare rating	19	20	21


TM30 & CRI diagram

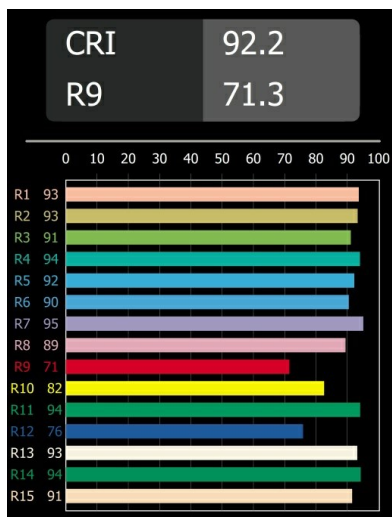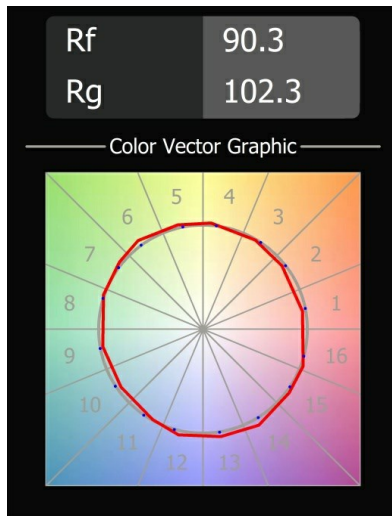


Light distribution & beam diagram

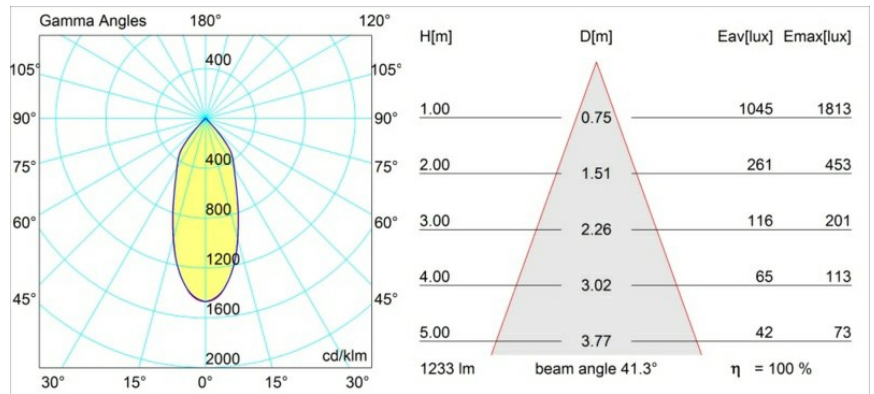

Installation Accessories



- 10203005** Baseflange 90 IP55 Aluminium Matt
- 10203009** Baseflange 90 White Structure
- 10203032** Baseflange 90 Black Structure



- 10204005** Baseflange 90 Tube Aluminium Matt
- 10204009** Baseflange 90 Tube White Structure
- 10204032** Baseflange 90 Tube Black Structure

Choose a required accessory