



| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Hollow Recessed Trimless Adjustable 115 1x LED 2700K Medium DE Gold Matt - Gold Matt

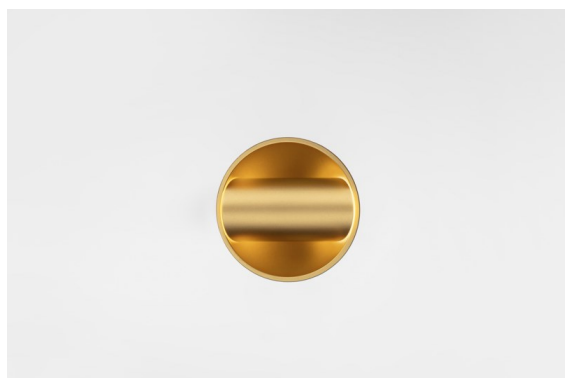

Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.

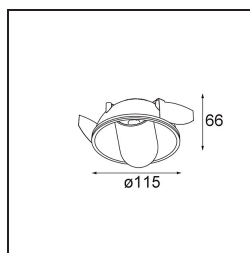


Specifications

| | |
|-------------------------------------|----------------------------------|
| Material | 12170087 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G7 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 91 99 100 100 48 |
| Binning (SDCM) | 2 |
| Optic | Lens |
| Measured beam angle (°) | 22.1 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Recessed |
| Cut-out size (mm) | ø146 |
| Mounting depth (mm) | 70.0 |
| Adjustability | H 360° V 90° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Gold, Matt |
| Secondary Colour & Secondary Finish | Gold, Matt |
| Gross weight (g) | 335.0 |
| Drive current (mA) | 350 500 |
| Min. forward voltage (Vf) | 14,8 15,2 |
| Max. forward voltage (Vf) | 18,0 18,6 |
| Connected load (W) | 5,7 8,5 |
| Luminous flux per lamp (lm) | 342 461 |
| Efficacy (lm/W) | 60 54 |
| Glare rating | 14 15 |

TM30 & CRI diagram



Light distribution & beam diagram

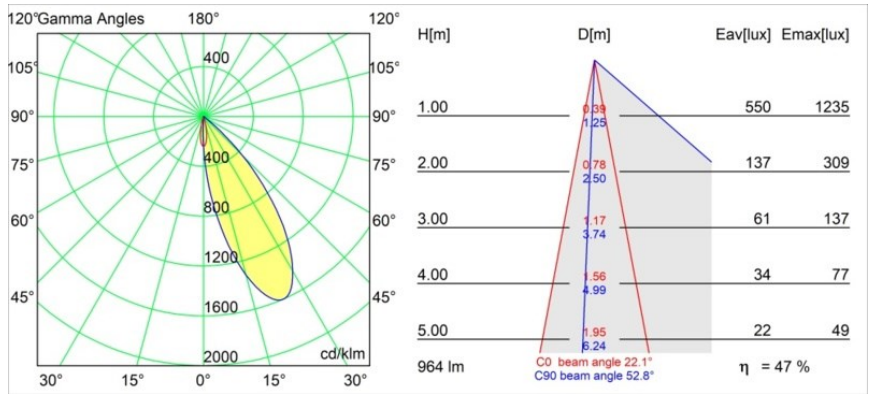

Installation Accessories



10889830 Installation Housing 192x190x130



12292830 Gypsum Fibreboard 190x190



14204030 Ring Recessed Trimless 146 1x

Choose a required accessory