



|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

*Hollow Recessed Trimless Adjustable 115 1x LED 2700K Medium DE Black Structure - Black Structure*

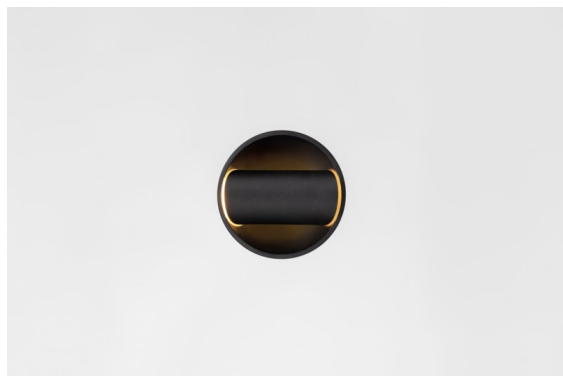

Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.

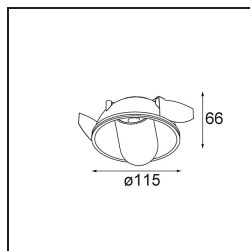

### Specifications


|                                     |                                  |
|-------------------------------------|----------------------------------|
| Material                            | 12170056                         |
| Light Source Type                   | LED                              |
| LED Type                            | BRIDGELUX V6 HD G7               |
| LED technology                      | LED COB                          |
| CRI                                 | Min. 90                          |
| Colour Temperature                  | 2700K                            |
| Lifetime                            | L80B10 @50,000 Hours             |
| Lamp Included                       | Yes                              |
| Number of Light Sources             | 1                                |
| CIE flux code                       | 92 99 100 100 48                 |
| Binning (SDCM)                      | 2                                |
| Optic                               | Lens                             |
| Measured beam angle (°)             | 21.3                             |
| Input Voltage                       | Constant Current Driver Required |
| Electrical Class                    | III                              |
| IP Rating                           | 20                               |
| Glow wire rating (°C)               | 960                              |
| Indoor/Outdoor                      | Indoor                           |
| Application                         | Ceiling, Wall                    |
| Mounting                            | Recessed                         |
| Cut-out size (mm)                   | ø146                             |
| Mounting depth (mm)                 | 70.0                             |
| Adjustability                       | H 360° V 90°                     |
| Distance to Lighted Object (m)      | 0,1                              |
| Primary Colour & Primary Finish     | Black, Structure                 |
| Secondary Colour & Secondary Finish | Black, Structure                 |
| Gross weight (g)                    | 335.0                            |
| Drive current (mA)                  | 350      500                     |
| Min. forward voltage (Vf)           | 14,8      15,2                   |
| Max. forward voltage (Vf)           | 18,0      18,6                   |
| Connected load (W)                  | 5,7      8,5                     |
| Luminous flux per lamp (lm)         | 344      464                     |
| Efficacy (lm/W)                     | 60      55                       |
| Glare rating                        | 13      14                       |



**TM30 & CRI diagram**




**Light distribution & beam diagram**

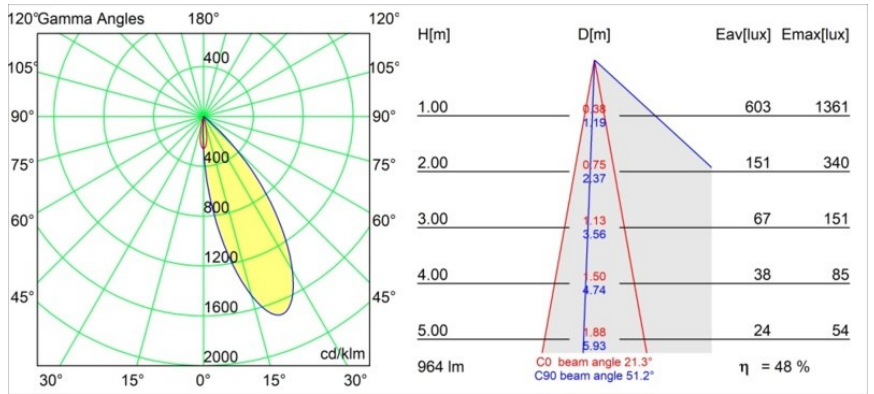


**Installation Accessories**



**10889830** Installation Housing 192x190x130



**12292830** Gypsum Fibreboard 190x190

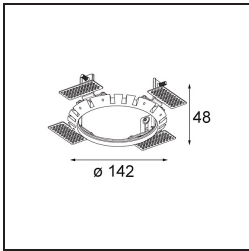

**14204030** Ring Recessed Trimless 146 1x

Choose a required accessory