


Date
Customer
Project
Type

Hollow Recessed Trimless Adjustable 115 1x LED 2700K Medium DE Black Structure - Black Structure



Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.

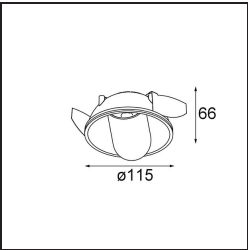

Specifications

Material	12170056	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G7	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	92 99 100 100 48	
Binning (SDCM)	2	
Optic	Lens	
Measured beam angle (°)	21.3	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Recessed	
Cut-out size (mm)	ø146	
Mounting depth (mm)	70.0	
Adjustability	H 360° V 90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Secondary Colour & Secondary Finish	Black, Structure	
Gross weight (g)	335.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	14.8	15.2
Max. forward voltage (Vf)	18.0	18.6
Connected load (W)	5.7	8.5
Luminous flux per lamp (lm)	344	464
Efficacy (lm/W)	60	55
Glare rating	13	14




MODULAR
LIGHTING —
INSTRUMENTS

*Hollow Recessed Trimless Adjustable 115 lx LED 2700K Medium
DE Black Structure - Black Structure*


TM30 & CRI diagram




Light distribution & beam diagram

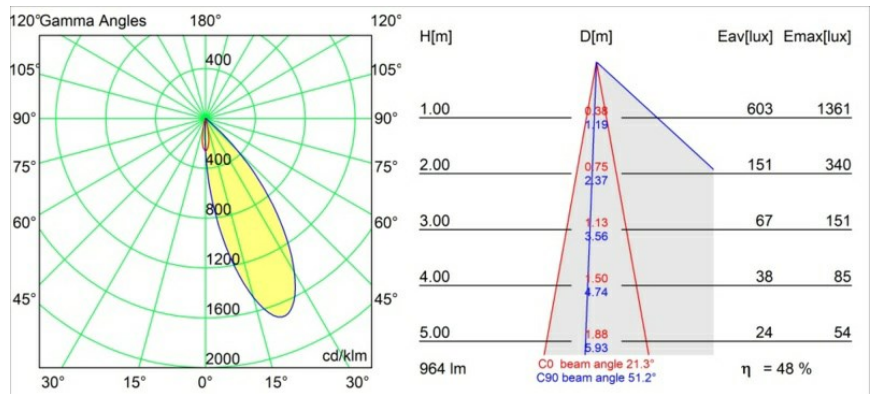


Installation Accessories

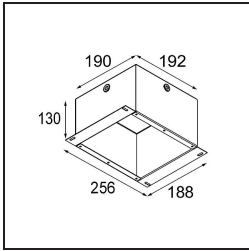

10889830 Installation Housing 192x190x130



12292830 Gypsum Fibreboard 190x190



14204030 Ring Recessed Trimless 146 1x

Choose a required accessory