



| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Hollow Recessed Adjustable 125 1x LED 2700K Medium DE White Structure - White Structure

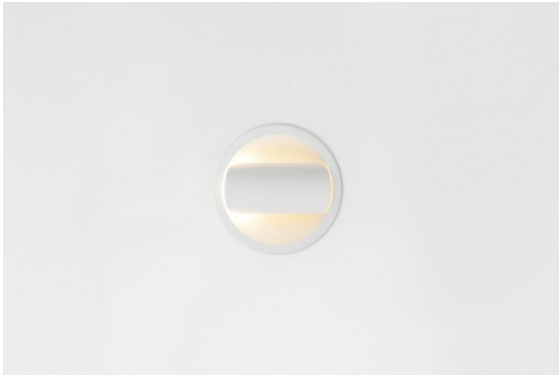

Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.




Specifications

| | | |
|-------------------------------------|----------------------------------|------|
| Material | 12171009 | |
| Light Source Type | LED | |
| LED Type | BRIDGELUX V6 HD G7 | |
| LED technology | LED COB | |
| CRI | Min. 90 | |
| Colour Temperature | 2700K | |
| Lifetime | L80B10 @50,000 Hours | |
| Lamp Included | Yes | |
| Number of Light Sources | 1 | |
| CIE flux code | 92 99 100 100 48 | |
| Binning (SDCM) | 2 | |
| Optic | Lens | |
| Measured beam angle (°) | 21.0 | |
| Input Voltage | Constant Current Driver Required | |
| Electrical Class | III | |
| IP Rating | 20 | |
| Glow wire rating (°C) | 960 | |
| Indoor/Outdoor | Indoor | |
| Application | Ceiling, Wall | |
| Mounting | Recessed | |
| Cut-out size (mm) | ø117 | |
| Mounting depth (mm) | 70.0 | |
| Adjustability | H 360° V 90° | |
| Distance to Lighted Object (m) | 0,1 | |
| Primary Colour & Primary Finish | White, Structure | |
| Secondary Colour & Secondary Finish | White, Structure | |
| Gross weight (g) | 335.0 | |
| Drive current (mA) | 350 | 500 |
| Min. forward voltage (Vf) | 14,8 | 15,2 |
| Max. forward voltage (Vf) | 18,0 | 18,6 |
| Connected load (W) | 5,7 | 8,5 |
| Delivered lumens (lm) | 346 | 467 |
| Efficacy (lm/W) | 61 | 55 |
| Glare rating | 13 | 14 |

TM30 & CRI diagram




Light distribution & beam diagram

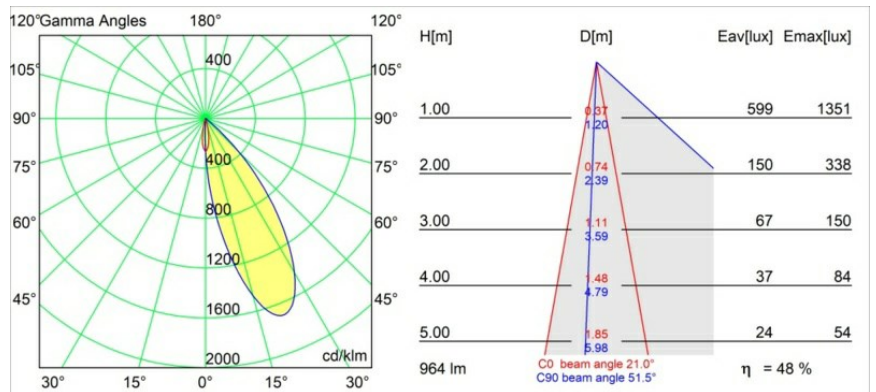

Installation Accessories



10889830 Installation Housing 192x190x130



12292830 Gypsum Fibreboard 190x190

Choose a required accessory