


Pate
Customer
Project
уре

Hollow Recessed Adjustable 125 1x LED 2700K Medium DE White Structure - White Structure



Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.



Specifications



Specifications			
Material	12171009		
Light Source Type	LED		
LED Type	BRIDGELUX V6 HD G7		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	92 99 100 100 48		
Binning (SDCM)	2		
Optic	Lens		
Measured beam angle (°)	21.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Recessed		
Cut-out size (mm)	ø117		
Mounting depth (mm)	70.0		
Adjustability	H 360° V 90)°	
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Stru	cture	
Secondary Colour & Secondary Finish	White, Stru	cture	
Gross weight (g)	335.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	14,8	15,2	
Max. forward voltage (Vf)	18,0	18,6	
Connected load (W)	5,7	8,5	
Luminous flux per lamp (lm)	346	467	

Efficacy (Im/W)

Glare rating

61

13

55

14






TM30 & CRI diagram






Light distribution & beam diagram

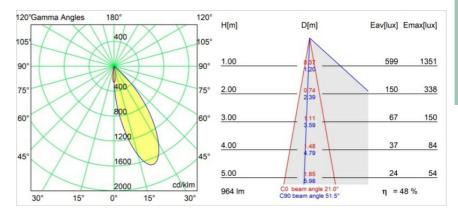




Installation Accessories



10889830 Installation Housing 192x190x130



12292830 Gypsum Fibreboard 190x190

Choose a required accessory