



Date
Customer
Project
Type

*Hollow Recessed Trimless Adjustable 115 1x LED 3000K Medium DE Gold Matt - Gold Matt*

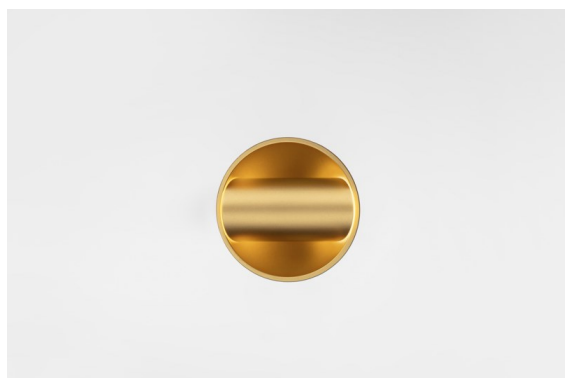

Hollow proposes direct light when open and indirect light when closed. But where does the light come from? Lit or dark, there and not there. A symphony of opposites, Hollow is a downlighter that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality.

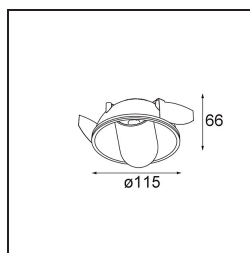

### Specifications


Material	12170187
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	91 99 100 100 48
Binning (SDCM)	2
Optic	Lens
Measured beam angle (°)	22.1
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø146
Mounting depth (mm)	70.0
Adjustability	H 360° V 90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Gold, Matt
Secondary Colour & Secondary Finish	Gold, Matt
Gross weight (g)	335.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	14,8      15,2
Max. forward voltage (Vf)	18,0      18,6
Connected load (W)	5,7      8,5
Luminous flux per lamp (lm)	349      470
Efficacy (lm/W)	61      55
Glare rating	14      15



**TM30 & CRI diagram**



**Light distribution & beam diagram**

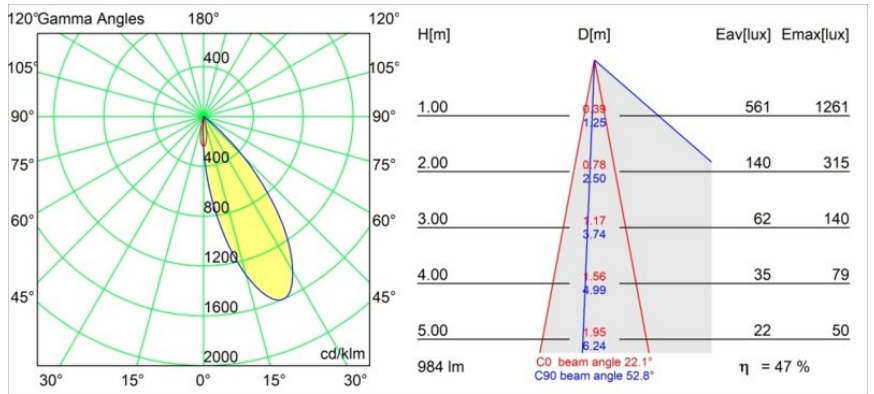

Diagrams

**Installation Accessories**



**10889830** Installation Housing 192x190x130



**12292830** Gypsum Fibreboard 190x190



**14204030** Ring Recessed Trimless 146 1x

Choose a required accessory