


Date
Customer
Project
Type

*Shellby Recessed 184 lx IP55 LED 3000K DE White Structure*



Shellby's light is the Sun by day, and the Moon by night. Like the Sun, it brings powerful, general light that indisputably brightens your space, and energises you for daily activities. Like the Moon, it watches, with softer light that inspires calm and warmth. A clash of functions, all in one.

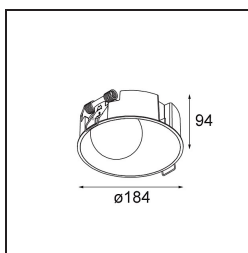


**Specifications**

Material	12180109
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	48 80 96 100 52
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø177
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	1080.0
Drive current (mA)	350      500      700
Min. forward voltage (Vf)	14,8      15,2      15,9
Max. forward voltage (Vf)	18,0      18,6      19,5
Connected load (W)	5,7      8,5      12,4
Luminous flux per lamp (lm)	383      516      668
Efficacy (lm/W)	67      61      54
Glare rating	29      30      31


**TM30 & CRI diagram**



**Light distribution & beam diagram**

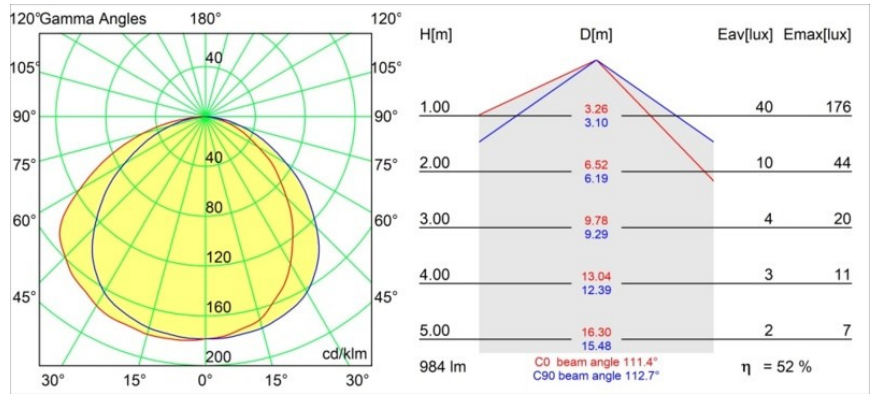


**Decorative Accessories**

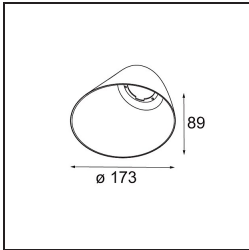


- 12183082** Skin Shellby Bronze Anodised
- 12183041** Skin Shellby Champagne Anodised
- 12183042** Skin Shellby Gold Anodised
- 12183092** Skin Shellby Pearly White Matt
- 12183084** Skin Shellby Silver Bronze Anodised

**Installation Accessories**

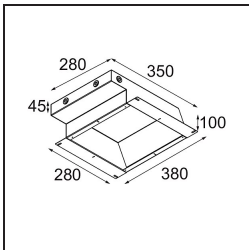

- 12182030** Installation Housing 280x350x100x380



- 12293030** Gypsum Fibreboard 290x280

Choose a required accessory