


Date
Customer
Project
Type

*Shellby Recessed 184 1x IP55 LED 2700K DE Black Structure*



Shellby's light is the Sun by day, and the Moon by night. Like the Sun, it brings powerful, general light that indisputably brightens your space, and energises you for daily activities. Like the Moon, it watches, with softer light that inspires calm and warmth. A clash of functions, all in one.

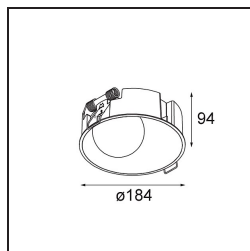


**Specifications**

Material	12180032
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G7
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	48 81 97 100 23
Binning (SDCM)	2
Light Direction	Down
Optic	Collimator
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø177
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1080.0
Drive current (mA)	350      500      700
Min. forward voltage (Vf)	14,8      15,2      15,9
Max. forward voltage (Vf)	18,0      18,6      19,5
Connected load (W)	5,7      8,5      12,4
Luminous flux per lamp (lm)	167      225      292
Efficacy (lm/W)	29      26      24
Glare rating	26      27      28


**TM30 & CRI diagram**



**Light distribution & beam diagram**

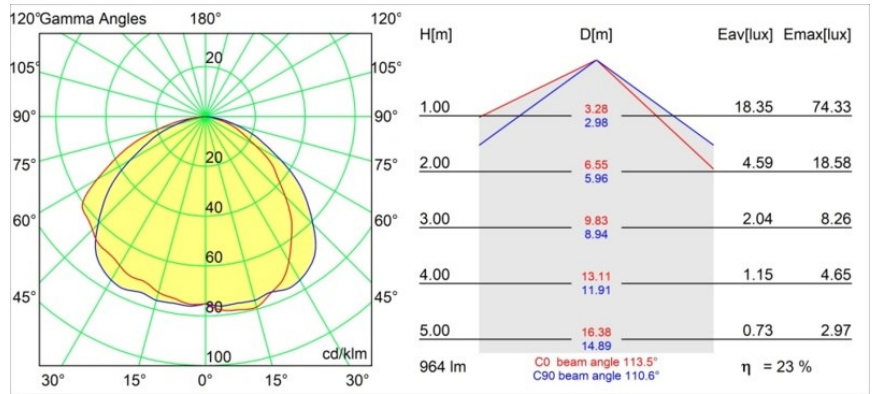


**Decorative Accessories**




- 12183082** Skin Shellby Bronze Anodised
- 12183041** Skin Shellby Champagne Anodised
- 12183042** Skin Shellby Gold Anodised
- 12183092** Skin Shellby Pearly White Matt
- 12183084** Skin Shellby Silver Bronze Anodised

**Installation Accessories**



- 12182030** Installation Housing 280x350x100x380



- 12293030** Gypsum Fibreboard 290x280

Choose a required accessory