


Date	
Customer	
Project	
Гуре	

Hipy Round Antiglare Floor Recessed Up 110 1x IP67 LED 3000K Medium DE Aluminium Anodised



Our popular floor spot Hipy Round continues to shine with its trailblazing personality. Two sizes, 70 and 110 and an option for a warmer colour temperature (2700K). Designers can create a welcoming path from the outside to the inside — or vice versa — and keep a consistent light effect. Thanks to the new CCT, Hipy is now more accessible to designers for an indoor floor expression.






a			c·			
Ν	ne	C11	1.C	at.	10	ns
$\sim$	ρ -	٠.,	-	000		

Material	12345005					
Light Source Type	LED					
LED Type	BRIDGELUX V8G8					
LED technology	LED COB					
CRI	Min. 90					
Colour Temperature	3000K					
Lifetime	L80B10 @50,000 Hours					
Lamp Included	Yes					
Number of Light Sources	1					
CIE flux code	99 100 100 100 39					
Binning (SDCM)	2					
Light Direction	Up					
Optic	Reflector					
Measured beam angle (°)	30.5					
Input Voltage	Constant Current Driver Required					
Electrical Class	III					
IP Rating	67					
Glow wire rating (°C)	960					
Indoor/Outdoor	Outdoor					
Application	Floor					
Mounting	Recessed					
Cut-out size (mm)	ø100					
Mounting depth (mm)	105.0					
Adjustability	Not Applicable					
Distance to Lighted Object (m)	0,1					
Primary Colour & Primary Finish	Aluminium, Anodised					
Gross weight (g)	626.0					
Drive current (mA)	350	500	700			
Min. forward voltage (Vf)	13,2	13,7	14,2			
Max. forward voltage (Vf)	15,0	15,4	16,0			
Connected load (W)	5,0	7,2	10,6			
Luminous flux per lamp (lm)	227	304	391			
Efficacy (Im/W)	45	42	37			
Glare rating	7 8 9					




## TM30 & CRI diagram





## Light distribution & beam diagram

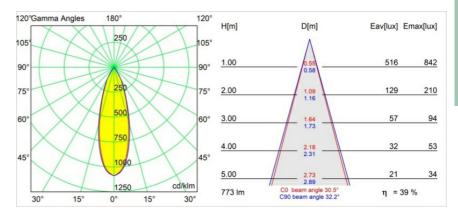



## Installation Accessories



**12349830** Installation Housing 114x165-100

Choose a required accessory