

---




---



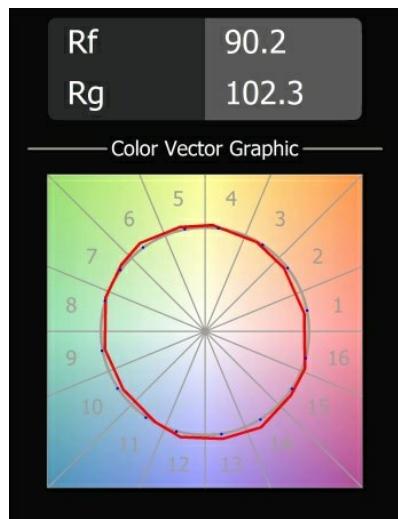
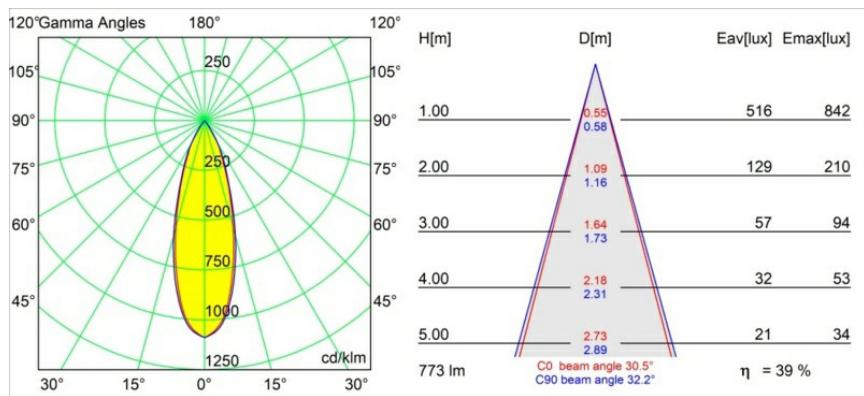
---




---

*Hipy Round Antiglare Floor Recessed Up 110 1x IP67 LED 3000K Medium DE Aluminium Anodised*

**Specifications**

Material	12345005		
Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	99 100 100 100 39		
Binning (SDCM)	2		
Light Direction	Up		
Optic	Reflector		
Measured beam angle (°)	30.5		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	67		
Glow wire rating (°C)	960		
Indoor/Outdoor	Outdoor		
Application	Floor		
Mounting	Recessed		
Cut-out size (mm)	Ø100		
Mounting depth (mm)	105.0		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Aluminium, Anodised		
Gross weight (g)	626.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	13,2	13,7	14,2
Max. forward voltage (Vf)	15,0	15,4	16,0
Connected load (W)	5,0	7,2	10,6
Luminous flux per lamp (lm)	227	304	391
Efficacy (lm/W)	45	42	37
Glare rating	7	8	9

**TM30 & CRI diagram**

**Light distribution & beam diagram**


### *Installation Accessories*



**12349830** Installation Housing 114x165-100

Choose a required accessory