



Date
Customer
Project
Type

*Hipy Round Asy Floor Recessed Up Adjustable 110 1x IP67 LED 3000K Flood DE Aluminium Anodised*

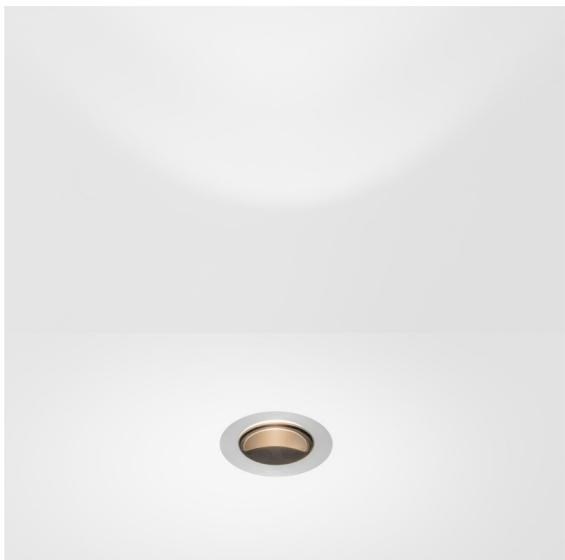


**Specifications**


Material	12345205
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	90 100 100 100 45
Binning (SDCM)	2
Light Direction	Up
Optic	Reflector
Measured beam angle (°)	37.3
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	67
Glow wire rating (°C)	960
Indoor/Outdoor	Outdoor
Application	Floor
Mounting	Recessed
Cut-out size (mm)	ø100
Mounting depth (mm)	105.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Anodised
Gross weight (g)	677.0
Drive current (mA)	350      500      700
Min. forward voltage (Vf)	13,2      13,7      14,2
Max. forward voltage (Vf)	15,0      15,4      16,0
Connected load (W)	5,0      7,2      10,6
Luminous flux per lamp (lm)	258      346      445
Efficacy (lm/W)	52      48      42
Glare rating	15      16      16

Our popular floor spot Hipy Round continues to shine with its trailblazing personality. Two sizes, 70 and 110 and an option for a warmer colour temperature (2700K). Designers can create a welcoming path from the outside to the inside — or vice versa — and keep a consistent light effect. Thanks to the new CCT, Hipy is now more accessible to designers for an indoor floor expression.


**TM30 & CRI diagram**

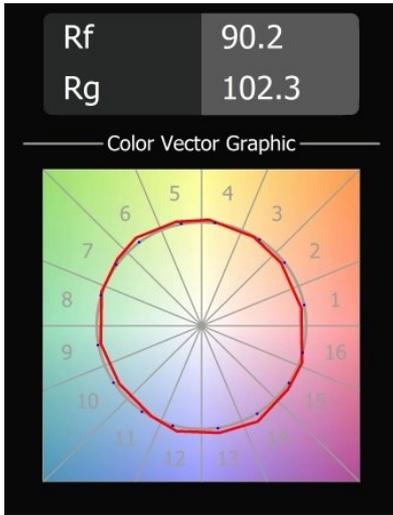

**Light distribution & beam diagram**

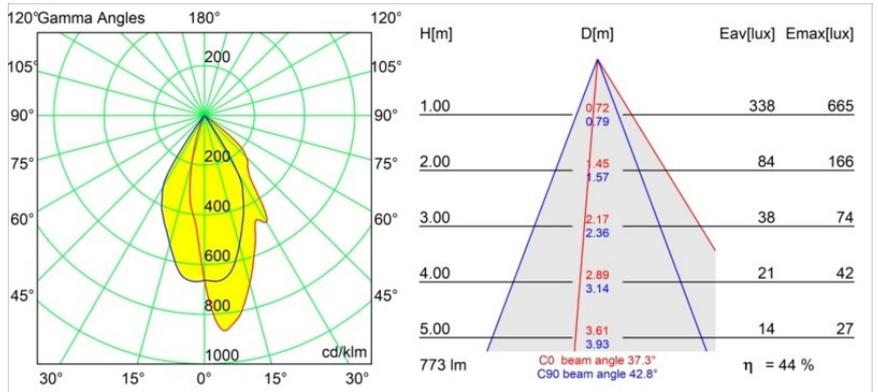

**Installation Accessories**



■ **12349830** Installation Housing 114x165-100

■ Choose a required accessory