


Date

Customer


Project

Type

Hipy Square Asy Floor Recessed Up Adjustable 110x110 1x IP67 LED 3000K Flood DE Aluminium Anodised

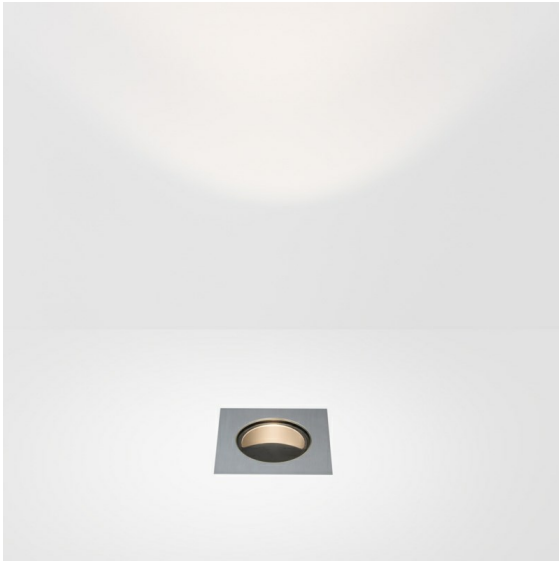

Our popular floor spot Hipy Square continues to shine with its trailblazing personality. Two sizes, 70 and 110 and an option for a warmer colour temperature (2700K). Designers can create a welcoming path from the outside to the inside — or vice versa — and keep a consistent light effect. Thanks to the new CCT, Hipy is now more accessible to designers for an indoor floor expression.

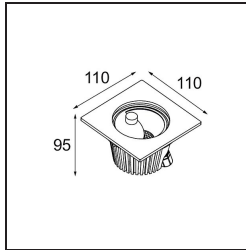


Specifications

| | | | |
|---------------------------------|----------------------------------|------|------|
| Material | 12346205 | | |
| Light Source Type | LED | | |
| LED Type | BRIDGELUX V8G8 | | |
| LED technology | LED COB | | |
| CRI | Min. 90 | | |
| Colour Temperature | 3000K | | |
| Lifetime | L80B10 @50,000 Hours | | |
| Lamp Included | Yes | | |
| Number of Light Sources | 1 | | |
| CIE flux code | 90 100 100 100 45 | | |
| Binning (SDCM) | 2 | | |
| Light Direction | Up | | |
| Optic | Reflector | | |
| Measured beam angle (°) | 37.3 | | |
| Input Voltage | Constant Current Driver Required | | |
| Electrical Class | III | | |
| IP Rating | 67 | | |
| Glow wire rating (°C) | 960 | | |
| Indoor/Outdoor | Outdoor | | |
| Application | Floor | | |
| Mounting | Recessed | | |
| Cut-out size (mm) | ø100 | | |
| Mounting depth (mm) | 105.0 | | |
| Adjustability | Not Applicable | | |
| Distance to Lighted Object (m) | 0,1 | | |
| Primary Colour & Primary Finish | Aluminium, Anodised | | |
| Gross weight (g) | 694.0 | | |
| Drive current (mA) | 350 | 500 | 700 |
| Min. forward voltage (Vf) | 13,2 | 13,7 | 14,2 |
| Max. forward voltage (Vf) | 15,0 | 15,4 | 16,0 |
| Connected load (W) | 5,0 | 7,2 | 10,6 |
| Delivered lumens (lm) | 258 | 346 | 445 |
| Efficacy (lm/W) | 52 | 48 | 42 |
| Glare rating | 15 | 16 | 16 |


TM30 & CRI diagram



Light distribution & beam diagram

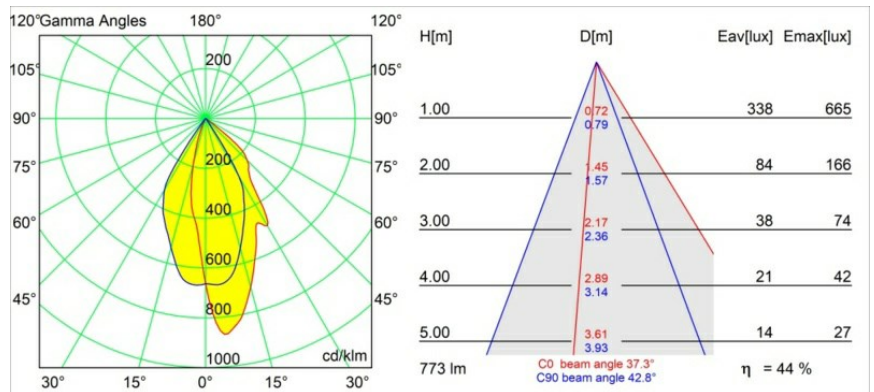

Installation Accessories

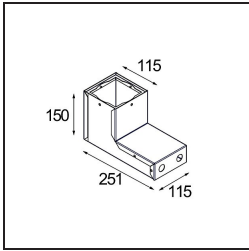

12349930 Installation Housing 115x115x150x251

Choose a required accessory