


Date	
Customer	
Project	
Гуре	

Hipy Square Floor Recessed Up 110x110 1x IP67 LED 3000K Flood DE Aluminium Anodised



Our popular floor spot Hipy Square continues to shine with its trailblazing personality. Two sizes, 70 and 110 and an option for a warmer colour temperature (2700K). Designers can create a welcoming path from the outside to the inside — or vice versa — and keep a consistent light effect. Thanks to the new CCT, Hipy is now more accessible to designers for an indoor floor expression.



Specifications

Primary Colour &

Gross weight (g)

Drive current (mA)

Connected load (W)

Efficacy (Im/W)

Glare rating

(Im)

Luminous flux per lamp

Min. forward voltage (Vf)

Max. forward voltage (Vf) 15,0

Primary Finish



Material	12346405
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 71
Binning (SDCM)	2
Light Direction	Up
Optic	Reflector
Measured beam angle (°)	40.9
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	67
Glow wire rating (°C)	960
Indoor/Outdoor	Outdoor
Application	Floor
Mounting	Recessed
Cut-out size (mm)	ø100
Mounting depth (mm)	105.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1

Aluminium, Anodised

500

13,7

15,4

7,2

547

76

13

700

14,2

16,0

10,6

703

66

14

642.0

350

13,2

5,0

408

82

12




TM30 & CRI diagram






Light distribution & beam diagram

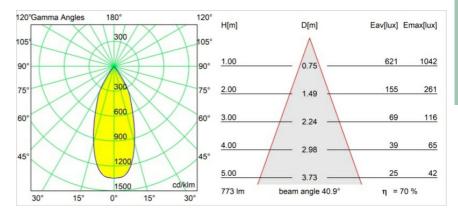



Installation Accessories



12349930 Installation Housing 115x115x150x251

Choose a required accessory