



Date
Customer
Project
Type

## Hipy Square Floor Recessed Up 110x110 1x IP67 LED 3000K Flood DE Aluminium Anodised

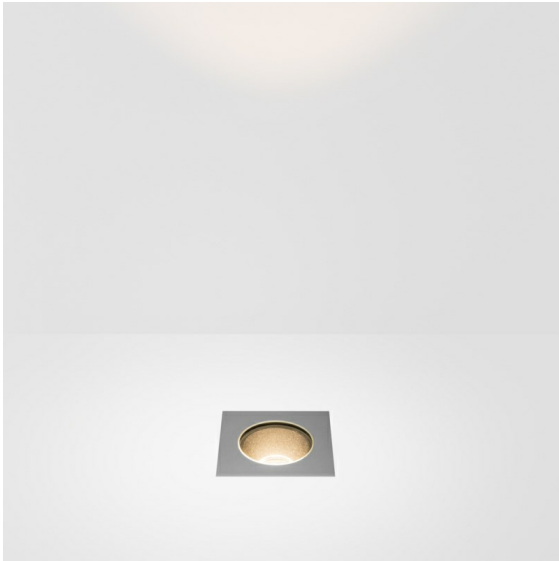



Our popular floor spot Hipy Square continues to shine with its trailblazing personality. Two sizes, 70 and 110 and an option for a warmer colour temperature (2700K). Designers can create a welcoming path from the outside to the inside — or vice versa — and keep a consistent light effect. Thanks to the new CCT, Hipy is now more accessible to designers for an indoor floor expression.




### Specifications

Material	12346405		
Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	100 100 100 100 71		
Binning (SDCM)	2		
Light Direction	Up		
Optic	Reflector		
Measured beam angle (°)	40.9		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	67		
Glow wire rating (°C)	960		
Indoor/Outdoor	Outdoor		
Application	Floor		
Mounting	Recessed		
Cut-out size (mm)	ø100		
Mounting depth (mm)	105.0		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Aluminium, Anodised		
Gross weight (g)	642.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	13,2	13,7	14,2
Max. forward voltage (Vf)	15,0	15,4	16,0
Connected load (W)	5,0	7,2	10,6
Delivered lumens (lm)	408	547	703
Efficacy (lm/W)	82	76	66
Glare rating	12	13	14

TM30 & CRI diagram

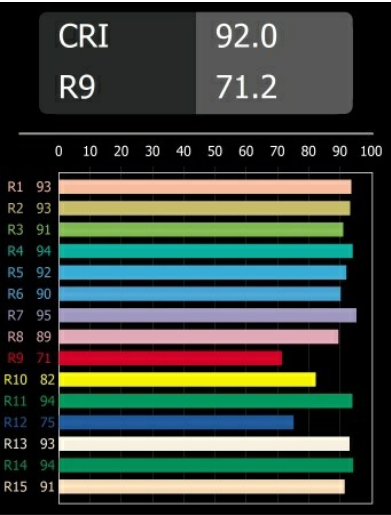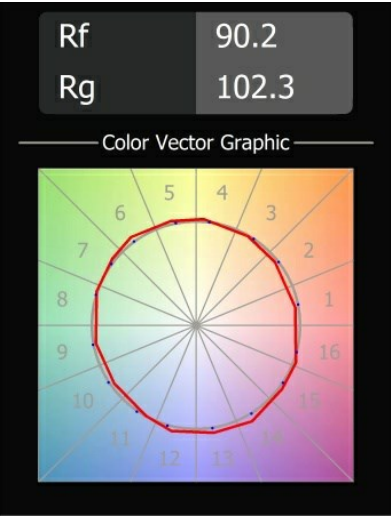


Light distribution & beam diagram

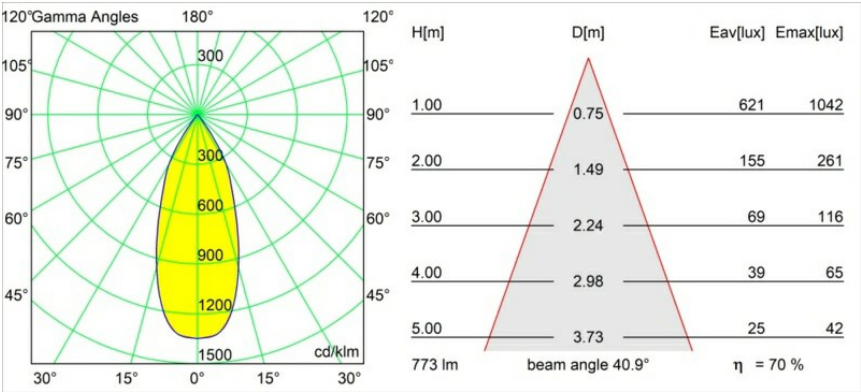



### *Installation Accessories*

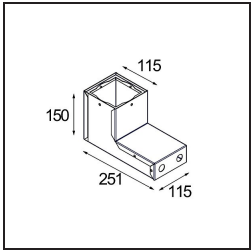

**12349930** Installation Housing 115x115x150x251

Choose a required accessory