


Date	
Customer	
Project	
Type	

## *Hipy Round Antiglare Floor Recessed Up 70 1x IP67 LED 3000K Medium DE Aluminium Anodised*




Our popular floor spot Hipy Round continues to shine with its trailblazing personality. Two sizes, 70 and 110 and an option for a warmer colour temperature (2700K). Designers can create a welcoming path from the outside to the inside — or vice versa — and keep a consistent light effect. Thanks to the new CCT, Hipy is now more accessible to designers for an indoor floor expression.

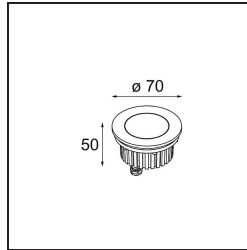


### **Specifications**

Material	12374205
Light Source Type	LED
LED Type	CREE 1304
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 46
Binning (SDCM)	2
Light Direction	Up
Optic	Reflector
Measured beam angle (°)	31.7
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	67
Glow wire rating (°C)	960
Indoor/Outdoor	Outdoor
Application	Floor
Mounting	Recessed
Cut-out size (mm)	ø67
Mounting depth (mm)	60.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Anodised
Gross weight (g)	269.0
Drive current (mA)	350
Min. forward voltage (Vf)	7.5
Max. forward voltage (Vf)	9.5
Connected load (W)	3.0
Delivered lumens (lm)	130
Efficacy (lm/W)	43

TM30 & CRI diagram

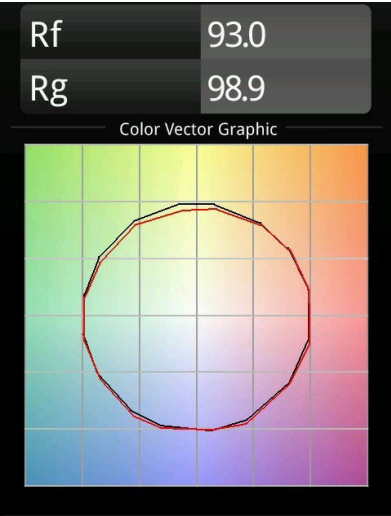


Light distribution & beam diagram

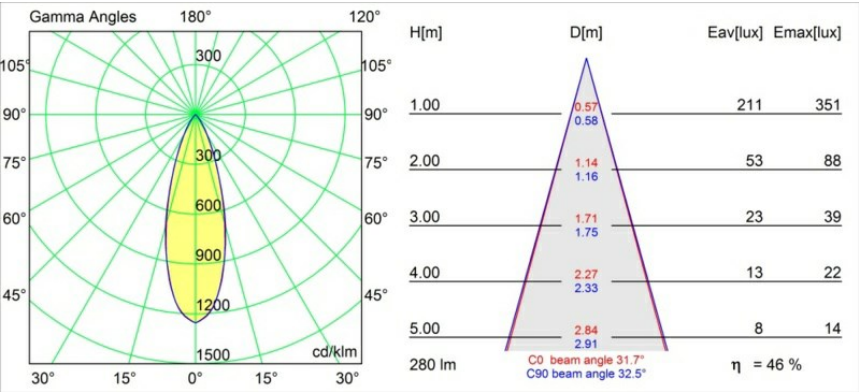


Diagrams

### Installation Accessories

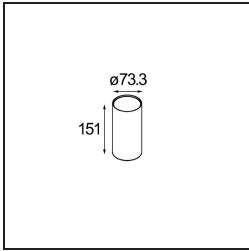

**12379630** Installation Housing 73x151 - 67



**12379830** Installation Housing 73x145x123

Choose a required accessory