



| |
|----------|
| Date |
| Customer |
| Project |
| Type |

FFD_LED Driver Constant Current DALI 500mA 10W

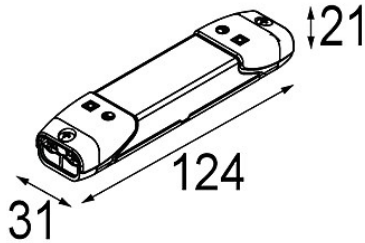

Specifications

| | |
|---------------------------------------|-----------------------|
| Material | 12409430 |
| Lamp Included | No |
| Number of Light Sources | 0 |
| Electrical Class | II |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Adjustability | Not Applicable |
| Gross weight (g) | 62.0 |
| Input voltage | 220-240V AC / 50-60Hz |
| Ambient temperature | -20°C to +50°C |
| Power factor | 0.94 |
| Driver fits through cut-out hole (mm) | 40.0 |
| Driver dimming technology | AM |
| Driver 2x LED output | No |
| Max. drivers on MCB 16A type B | 130 |