


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Trapz Wall Up/Down 2x LED 2700K Trailing Edge DI Silver Bronze Brushed Anodised - Black Matt




Specifications

| | |
|-------------------------------------|---------------------------------|
| Material | 12590212 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V8G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L90B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 2 |
| CIE flux code | 69 92 98 50 58 |
| Binning (SDCM) | 2 |
| Light Direction | Up/Down |
| Input Voltage | 230V |
| Luminaire power (W) | 12.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Trailing Edge |
| Indoor/Outdoor | Indoor |
| Application | Wall |
| Mounting | Surface |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Silver Bronze, Brushed Anodised |
| Secondary Colour & Secondary Finish | Black, Matt |
| Gross weight (g) | 1181.0 |
| Delivered lumens (lm) | 564 |
| Efficacy (lm/W) | 47 |
| Glare rating | 16 |

With their indirect lighting and subtle shadow effects, wall fixtures are undoubtedly atmosphere creators. Trapz, our organic interpretation inspired by a trapezium, is no different. The flattened cylinder has been finished with two oblique openings, which allow you to see the contrasting interior of the luminaire and immediately create an unusual chiaroscuro effect.

TM30 & CRI diagram

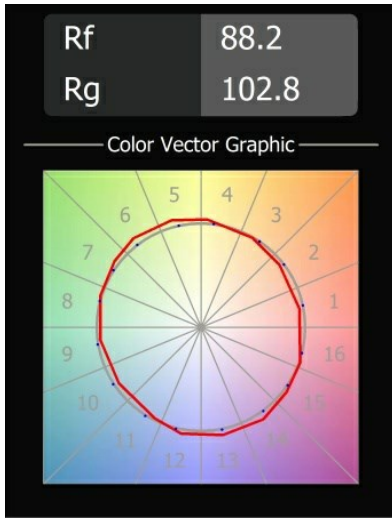

Light distribution & beam diagram

