
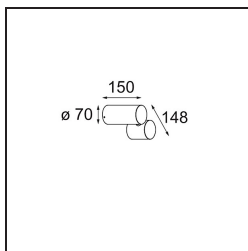


Date
Customer
Project
Type

*Lowie Surface 70 1x IP54 LED 3000K Flood Non-Dim DI Black Structure*

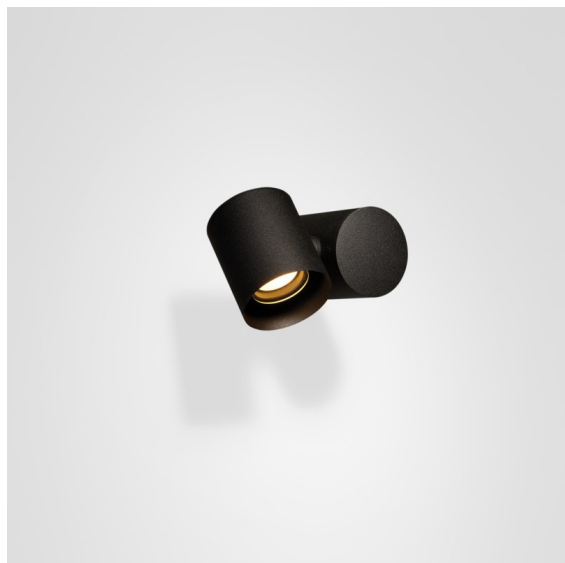

**Specifications**

Material	12670308
Light Source Type	LED
LED Type	LED LOWIE/LOWIEZE/SULFER
LED technology	LED high power
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	39.7
Input Voltage	230V
Luminaire power (W)	5.8
Electrical Class	I
IP Rating	54
Glow wire rating (°C)	960
Dimming Protocol	Non-Dim
Indoor/Outdoor	Outdoor
Application	Ceiling, Wall, Floor
Mounting	Surface
Adjustability	V 359°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1140.0
Luminous flux per lamp (lm)	208
Efficacy (lm/W)	41
Glare rating	9

Lowie is the noble member of a highly versatile outdoor family (IP54). Together with Lowieze, they will turn your garden into a theatre. Lowie (for wall mounting) is a perfect example of form blending with function. The cylindrical light units can rotate fully around the body, also a cylinder, and be used as uplights or downlights independently of each other. Available with one or two light units.

**TM30 & CRI diagram**



**Light distribution & beam diagram**



**Installation Accessories**



**11189802** Earthpin 350 Black

Choose a required accessory