


Date
Customer
Project
Type

Medard Semi-Recessed Adjustable 70 1x LED 3000K Medium DE White Structure



The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.

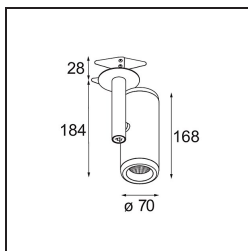

Specifications

Material	12736209
Light Source Type	LED
LED Type	BRIDGELUX VERO13 G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 88
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	25.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	ø65
Mounting depth (mm)	80.0
Adjustability	H 355° V 360°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	986.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	28,3 29,0
Max. forward voltage (Vf)	32,9 33,6
Connected load (W)	10,7 15,7
Luminous flux per lamp (lm)	920 1261
Efficacy (lm/W)	84 78
Glare rating	16 17


Remark

- 4000K on request
-

TM30 & CRI diagram



Light distribution & beam diagram

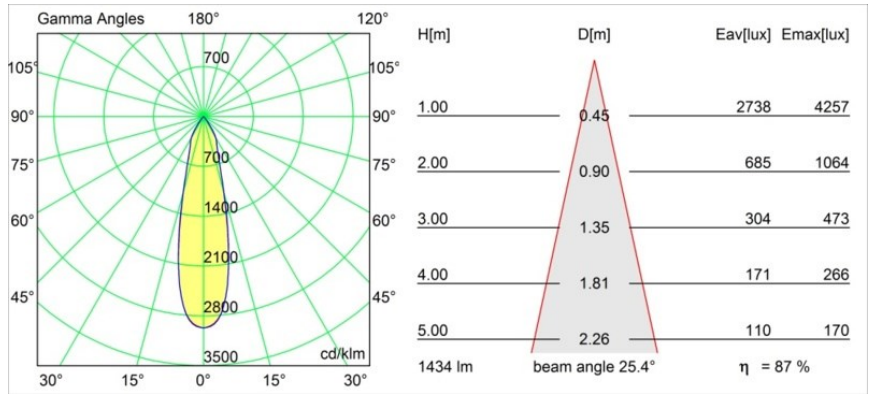


Diagrams

Installation Accessories



10490330 Installation Housing 172x112x100



12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory