



Date
Customer
Project
Type

## Lowieze Surface 70 Low 2x IP54 LED 3000K Flood Non-Dim DI Black Structure

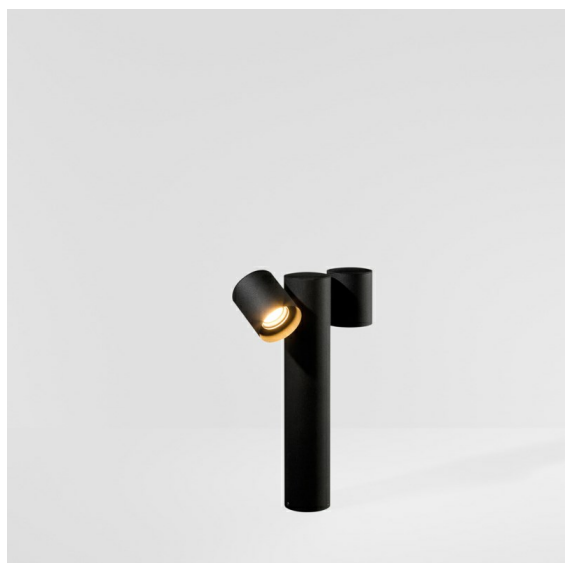


Lowieze is a highly versatile outdoor luminaire and comes in two heights. The shorter version is perfect for lighting a pathway, while the taller one works wonders at highlighting garden features. The cylindrical light units can rotate fully around the body, also a cylinder, and can therefore be used as uplights or downlights independently of each other. Available with one or two light units.

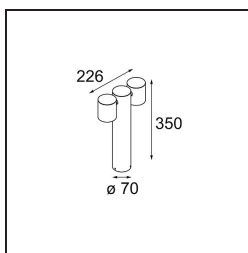


### Specifications

Material	12671408
Light Source Type	LED
LED Type	LED LOWIE/LOWIEZE/SULFER
LED technology	LED high power
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	39.7
Input Voltage	230V
Luminaire power (W)	9.1
Electrical Class	I
IP Rating	54
Glow wire rating (°C)	960
Dimming Protocol	Non-Dim
Indoor/Outdoor	Outdoor
Application	Ceiling, Wall, Floor
Mounting	Surface
Adjustability	V 359°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1755.0
Delivered lumens (lm)	208
Efficacy (lm/W)	23
Glare rating	9

TM30 & CRI diagram

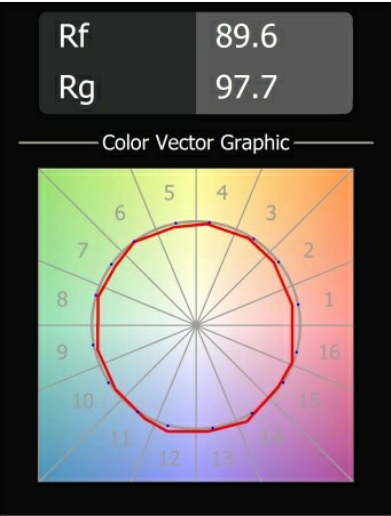


Light distribution & beam diagram

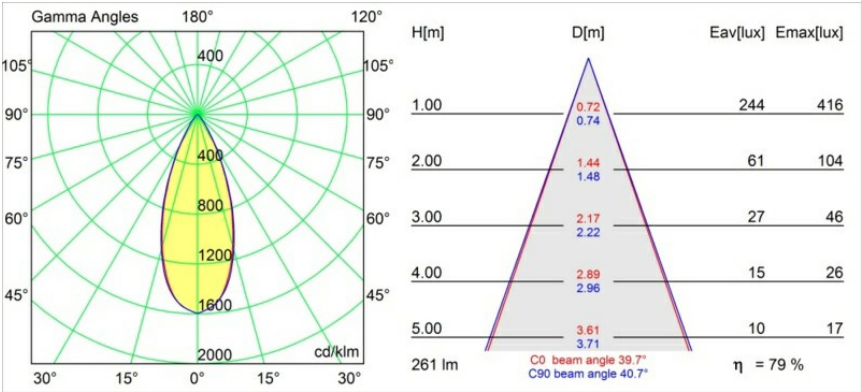



### *Installation Accessories*

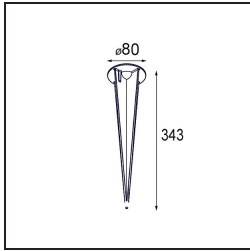

**11189802** Earthpin 350 Black

Choose a required accessory