
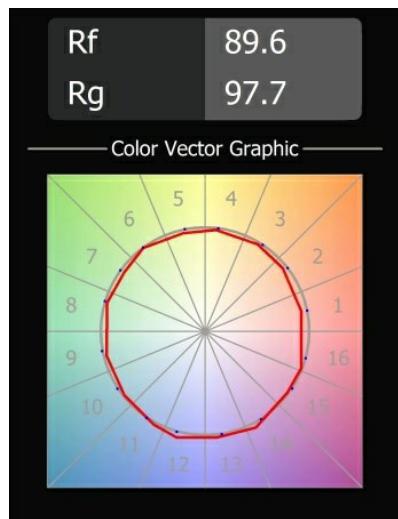
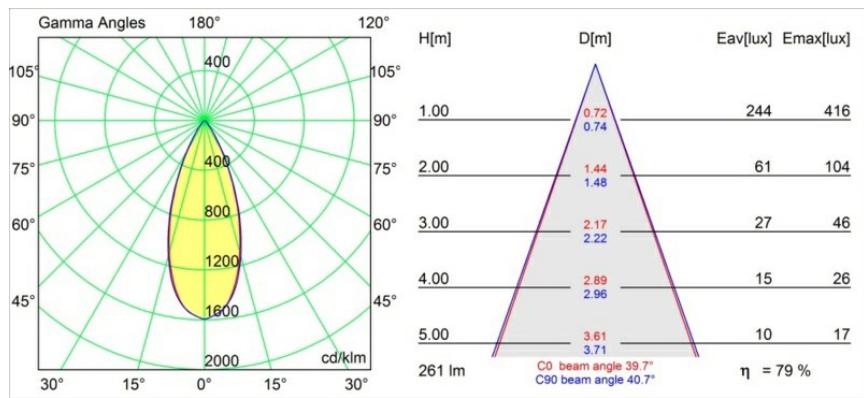

Lowieze Floor 70 High 2x IP54 LED 3000K Flood Non-Dim DI Black Structure



Specifications

| | |
|---------------------------------|--------------------------|
| Material | 12672408 |
| Light Source Type | LED |
| LED Type | LED LOWIE/LOWIEZE/SULFER |
| LED technology | LED high power |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 2 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 39.7 |
| Input Voltage | 230V |
| Luminaire power (W) | 9.1 |
| Electrical Class | I |
| IP Rating | 54 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Non-Dim |
| Indoor/Outdoor | Outdoor |
| Application | Floor |
| Adjustability | V 359° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 2430.0 |
| Luminous flux per lamp (lm) | 208 |
| Efficacy (lm/W) | 23 |
| Glare rating | 9 |

Lowieze is a highly versatile outdoor luminaire and comes in two heights. The shorter version is perfect for lighting a pathway, while the taller one works wonders at highlighting garden features. The cylindrical light units can rotate fully around the body, also a cylinder, and can therefore be used as uplights or downlights independently of each other. Available with one or two light units.

TM30 & CRI diagram

Light distribution & beam diagram


Installation Accessories



11189802 Earthpin 350 Black

Choose a required accessory