




Date
Customer
Project
Type

Medard Surface Adjustable 70 1x LED 1800-3000K WD Flood Trailing Edge DI Black Structure




The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.



Specifications

Material	12732432
Light Source Type	LED
LED Type	BRIDGELUX WARM DIM 12W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 83
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	37.0
Input Voltage	230V
Luminaire power (W)	13.5
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	H 360° V 360°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1186.0
Luminous flux per lamp (lm)	821
Efficacy (lm/W)	61
Glare rating	17
Remark	• 4000K on request

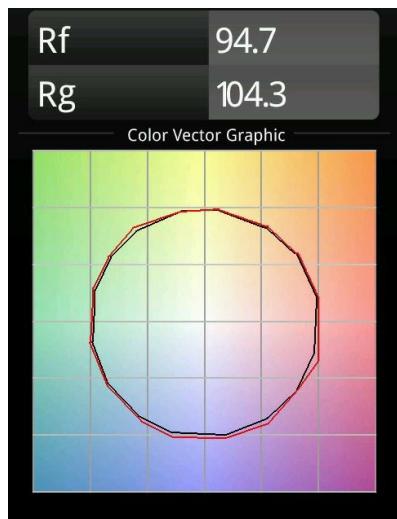TM30 & CRI diagram

Light distribution & beam diagram
