


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Medard Track 230V Adjustable 70 lx LED 3000K Flood DALI DI White Structure





The quirky long legs of the praying mantis inspired the Dutch Basten Leijh Design Studio for the creation of Medard, its initial design being a stylish table lamp. Now a large, versatile family of accent lights, and a lot of flexibility, Medard opens into a multitude of elegant applications.

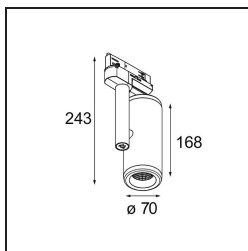

Specifications

| | |
|---------------------------------|---|
| Material | 12737409 |
| Light Source Type | LED |
| LED Type | BRIDGELUX VERO13 G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 84 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 38.0 |
| Input Voltage | 230V |
| Luminaire power (W) | 13.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Adjustability | H 355° V 360° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 1152.0 |
| Luminous flux per lamp (lm) | 879 |
| Efficacy (lm/W) | 67 |
| Glare rating | 16 |
| Remark | <ul style="list-style-type: none"> • 4000K on request • This is not a complete product. Track 230V system required. |

TM30 & CRI diagram

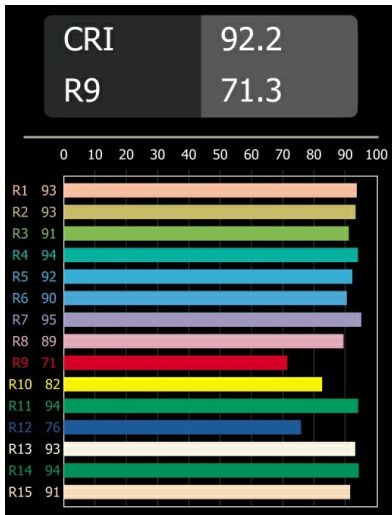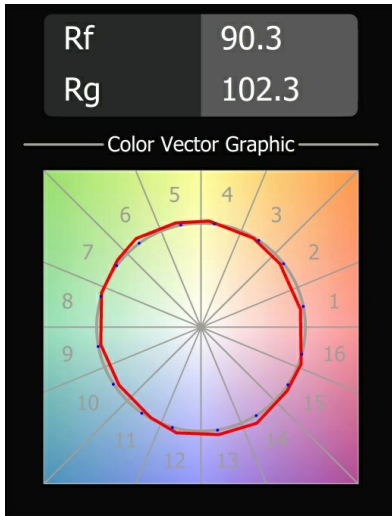

Light distribution & beam diagram

