MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Smart Kup Recessed 115 1x LED 3000K Wide Flood DE White Structure

I 3 originali design Smart (Kup, Lotis e Cake) riescono ancora a rubare il cuore degli interior designer. E questo vale per tutta la famiglia Smart. L'accessibilità e l'estrema versatilità di Smart sono adatte a qualsiasi espressione. Mescola e abbina luci d'accento, up e downlight, fisse o regolabili, un mosaico di forme, dimensioni, colori e opzioni di montaggio e crea un'installazione giocosa.



Specifications

Materiale	12760109		
Tipo di Sorgente	LED		
Tipologia LED	BRIDGELUX VERO13 G8		
Tecnologie LED	COB		
CRI	Min. 90		
Temperatura di colore della luce	3000K		
Vita utile	L80B10 @50.000 ore		
Lampadina inclusa	Sì		
Numero di fonte luminosa	1		
Codice di flusso CIE	96 98 100 100 89		
Binning (SDCM)	2		
Direzione della luce	Diretta		
Ottiche	Riflettore		
Fascio misurato (°)	64,0		
Volt in ingresso	Necessario driver a corrente costante		
Classificazione elettrica	III		
Grado IP	20		
Test filo a caldo (°C)	960		
Interno/Esterno	Interno		
Applicazione	Soffitto, Parete		
Montaggio	Incassato		
Foro d'incasso (mm)	ø108		
Profondità di montaggio (mm)	100,0		
Orientabilità	Not Applicable		
Distanza dall'oggetto illuminato (m)	0,1		
Colore primario & Finitura primaria	Bianco, Strutturata		
Peso lordo (g)	267,0		
Corrente di azionamento (mA)	350	500	700
Min. forward voltage (Vf)	28,3	29,0	29,7
Max. forward voltage (Vf)	32,9	33,6	34,5
Connected load (W)	10,7	15,7	22,5
Flusso luminoso per lampade (lm)	1309	1785	2336
Efficienza (lm/W)	122	114	104

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 10:26:29 AM - ©Modular Lighting Instruments

Livello abbagliamento	20	22	22
Remark	• 3500K su richiesta		

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 10:26:29 AM - ©Modular Lighting Instruments

TM30 & CRI diagram

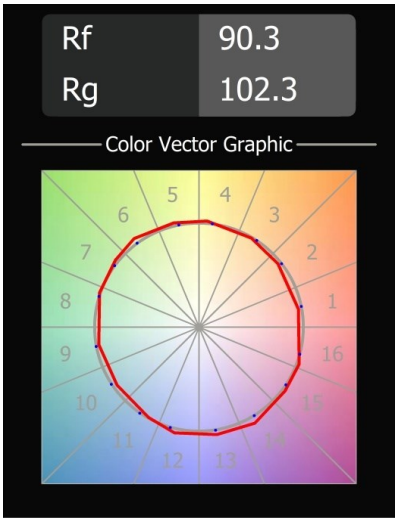

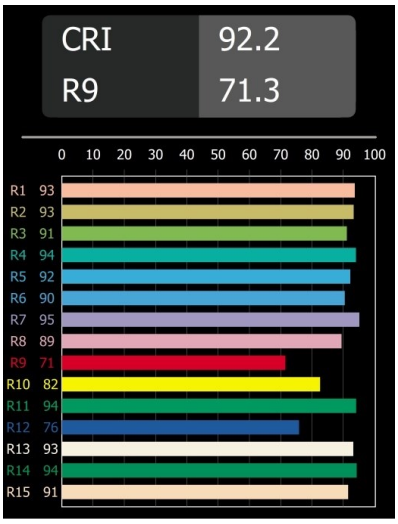

Light distribution & beam diagram

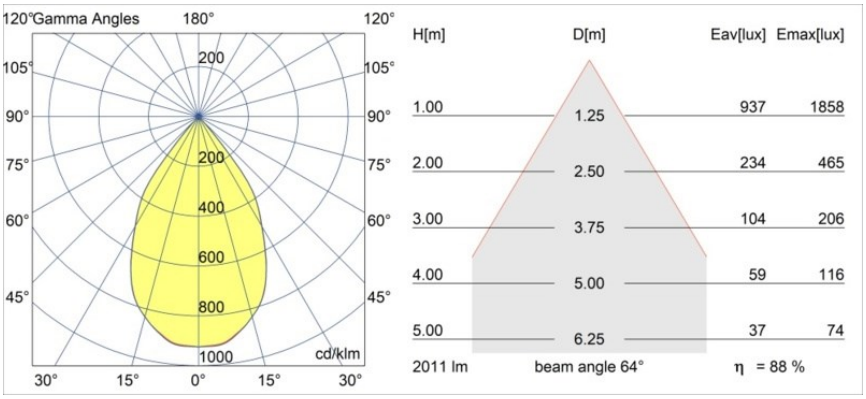

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 10:26:29 AM - ©Modular Lighting Instruments

Accessori Decorativi



12810009 Mask Smart 115 1x White Structure
12810032 Mask Smart 115 1x Black Structure
12810046 Mask Smart 115 1x Gold Matt



12810109 Mask Smart 115 2x White Structure
12810132 Mask Smart 115 2x Black Structure
12810146 Mask Smart 115 2x Gold Matt

Accessori Installazione



10889830 Installation Housing 192x190x130



12290530 Plaster Kit 190X190 - 108 1x



12810230 Ring Recessed 115 1x

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 10:26:29 AM - ©Modular Lighting Instruments

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-17, 10:26:29 AM - ©Modular Lighting Instruments