


Rektor Semi-Recessed Adjustable 78x78 1x LED 2700K Medium DE Black Structure




With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.




Specifications

Material	12821032	
Light Source Type	LED	
LED Type	BRIDGELUX VERO13	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
Binning (SDCM)	3	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	22.9	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Semi-Recessed	
Cut-out size (mm)	ø65	
Mounting depth (mm)	70.0	
Adjustability	H 360° V -90°/+90°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Gross weight (g)	741.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	29.1	29.9
Max. forward voltage (Vf)	33.7	34.7
Connected load (W)	11.0	16.2
Luminous flux per lamp (lm)	791	1085
Efficacy (lm/W)	72	67
Glare rating	22	23


TM30 & CRI diagram

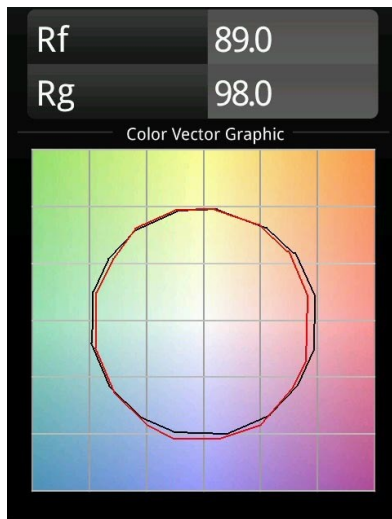


Light distribution & beam diagram

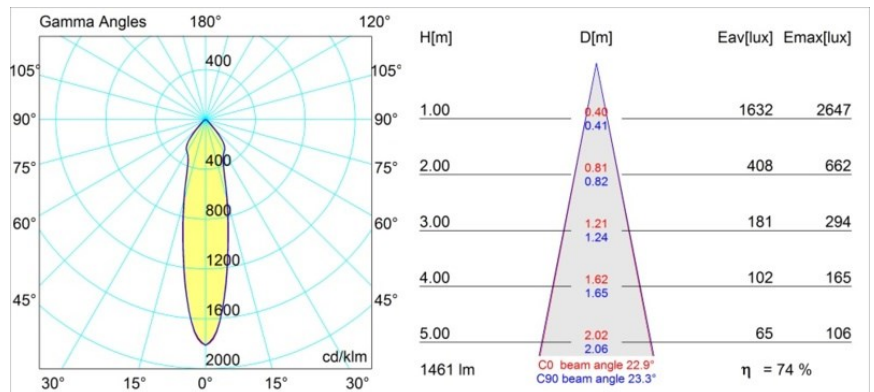

Installation Accessories



10490330 Installation Housing 172x112x100



12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory