


Date
Customer
Project
Туре

Smart Cake Recessed 48 1x LED 3000K Medium DE Black Structure




The 3 original designs, Smart Kup, Lotis and Cake still manage to steal the hearts of interior designers. And this goes for the entire Smart family. Smart's accessibility and extreme versatility are arguably fit for any expression. Mix and match accent lighting, up and downlight, fixed or adjustable, a mosaic of shapes, sizes, colours and mounting options, and create a playful installation.

## Specifications

Light Source Type LED Type LED technology				
LED Type LED technology	NICHIA GE			
LED technology				
		NICHIA GEN2		
CRI	LED high power			
	Min. 90			
Colour Temperature	3000K			
Lifetime	L80B20 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
Binning (SDCM)	3			
Light Direction	Down			
Optic	Collimator			
Measured beam angle (°)	23.3			
Input Voltage	Constant Current Driver Required			
Electrical Class				
IP Rating	20			
Glow wire rating (°C)	960			
Indoor/Outdoor	Indoor			
Application	Ceiling, Wall			
Mounting	Recessed			
Cut-out size (mm)	ø44			
Mounting depth (mm)	52.0			
Adjustability	Not Applica	able		
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Black, Stru	cture		
Gross weight (g)	131.0			
Drive current (mA)	350	500		
Min. forward voltage (Vf)	2,7	2,7		
Max. forward voltage (Vf)	3,3	3,3		
Connected load (W)	1,0	1,45		
Delivered lumens (Im)	71	101		
Efficacy (Im/W)	71	67		
Glare rating	12	14		



## Light distribution & beam diagram

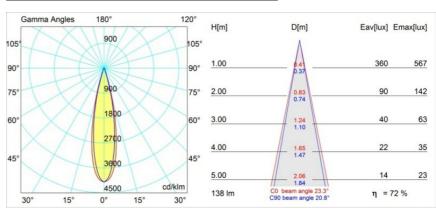




## Decorative Accessories



 13350009
 Mask Smart 48 1x White Structure


 13350032
 Mask Smart 48 1x Black Structure

 13350046
 Mask Smart 48 1x Gold Matt




13350109Mask Smart 48 2x White Structure13350132Mask Smart 48 2x Black Structure13350146Mask Smart 48 2x Gold Matt


## Installation Accessories



12293730 Plaster Kit 44 1x



12290730 Plaster Kit 100x120-45 1x



10889530 Installation Housing 123x100x80

Choose a required accessory

