


Date
Customer
Project
уре

Smart Kup Recessed 48 1x LED 3000K Medium DE White Structure



The 3 original designs, Smart Kup, Lotis and Cake still manage to steal the hearts of interior designers. And this goes for the entire Smart family. Smart's accessibility and extreme versatility are arguably fit for any expression. Mix and match accent lighting, up and downlight, fixed or adjustable, a mosaic of shapes, sizes, colours and mounting options, and create a playful installation.





Specifications						
Material	12880009					
Light Source Type	LED					
LED Type	NICHIA GE	N2				
LED technology	LED high p	oower				
CRI	Min. 90					
Colour Temperature	3000K					
Lifetime	L80B20 @	50,000	Hours			
Lamp Included	Yes					
Number of Light Sources	1					
Binning (SDCM)	3					
Light Direction	Down					
Optic	Collimator					
Measured beam angle (°)	22.5					
Input Voltage	Constant (Current	Driver	Require	ed .	
Electrical Class	III					
IP Rating	20					
Glow wire rating (°C)	960					
Indoor/Outdoor	Indoor					
Application	Ceiling, W	all				
Mounting	Recessed					
Cut-out size (mm)	ø44					
Mounting depth (mm)	52.0					
Adjustability	Not Applic	able				
Distance to Lighted Object (m)	0,1					
Primary Colour & Primary Finish	White, Str	ucture				
Gross weight (g)	118.0					
Drive current (mA)	350	500				
Min. forward voltage (Vf)	2,7	2,7				
Max. forward voltage (Vf)	3,3	3,3				
Connected load (W)	1,0	1,45				
Delivered lumens (Im)	89	125				
Efficacy (Im/W)	89	83				
	_	_			-	


6

Glare rating

7



Light distribution & beam diagram

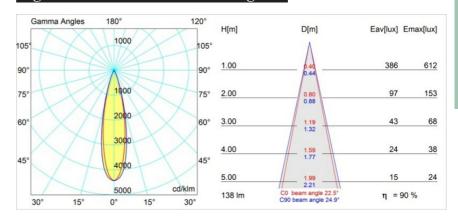



Decorative Accessories



13350009 Mask Smart 48 1x White Structure 13350032 Mask Smart 48 1x Black Structure 13350046 Mask Smart 48 1x Gold Matt




 13350109
 Mask Smart 48 2x White Structure


 13350132
 Mask Smart 48 2x Black Structure

 13350146
 Mask Smart 48 2x Gold Matt


Installation Accessories



12293730 Plaster Kit 44 1x



10889530 Installation Housing 123x100x80



12290730 Plaster Kit 100x120-45 1x

Choose a required accessory

