


Date
Customer
Project
Type

*Wink Recessed 115 1x IP54 LED 3000K Spot DE White Structure*



Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.

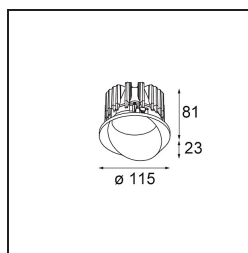

**Specifications**

Material	13070109
Light Source Type	LED
LED Type	BRIDGELUX VERO13 G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	89 96 99 100 85
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	16.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	54
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø133
Mounting depth (mm)	100.0
Adjustability	H 360°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	859.0
Drive current (mA)	350      500      700
Min. forward voltage (Vf)	28.3      29.0      29.7
Max. forward voltage (Vf)	32.9      33.6      34.5
Connected load (W)	10.7      15.7      22.5
Luminous flux per lamp (lm)	1251      1707      2233
Efficacy (lm/W)	117      109      99
Glare rating	21      22      23

---


Remark

- This is not a complete product. Recessed Ring or Wink Flange required.

**TM30 & CRI diagram**




**Light distribution & beam diagram**

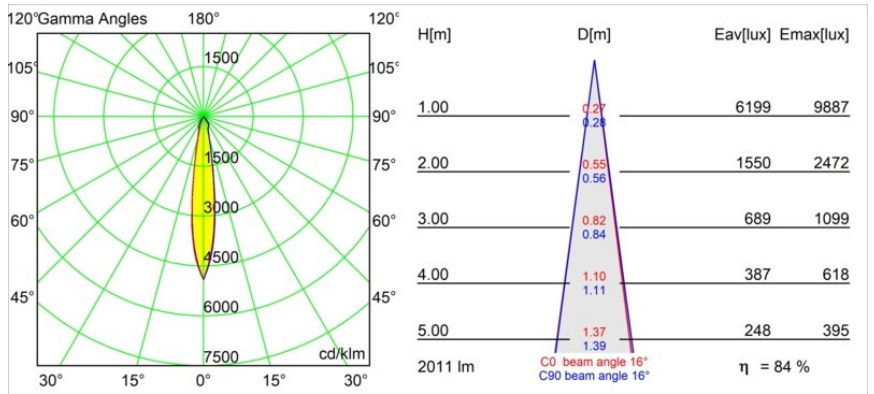


Diagrams

**Installation Accessories**

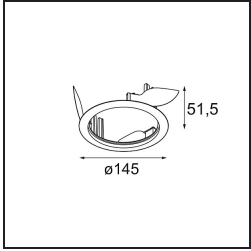

- **13073009** Ring Recessed 115 Wink White Structure
- **13073032** Ring Recessed 115 Wink Black Structure

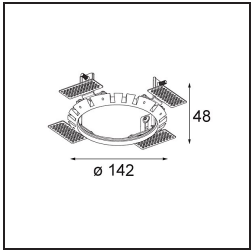

- **14204030** Ring Recessed Trimless 146 1x
- Choose a required accessory