

---




---



---



---

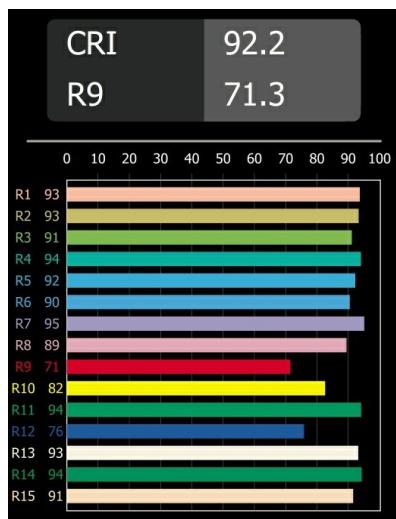
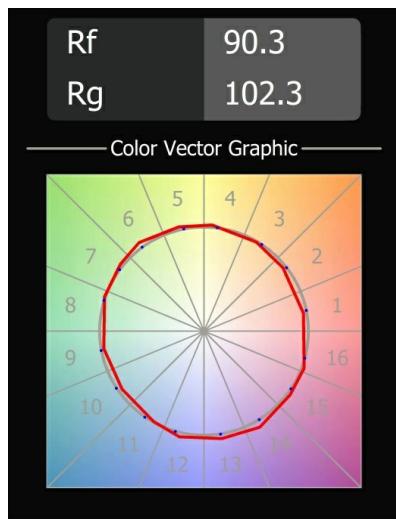
*Wink Asy Recessed 115 Ix IP54 LED 3000K Spot DE White Structure*

**Specifications**

Material	13071109		
Light Source Type	LED		
LED Type	BRIDGELUX VERO13 G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	77 96 99 100 82		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	15.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	54		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	Ø133		
Mounting depth (mm)	100.0		
Adjustability	H 355°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	871.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	28,3	29,0	29,7
Max. forward voltage (Vf)	32,9	33,6	34,5
Connected load (W)	10,7	15,7	22,5
Luminous flux per lamp (lm)	1203	1641	2147
Efficacy (lm/W)	112	105	95
Glare rating	14	15	16
Remark	• This is not a complete product. Recessed Ring		


---

or Wink Flange required.

---


**TM30 & CRI diagram**


### *Installation Accessories*



13073009 Ring Recessed 115 Wink White Structure

13073032 Ring Recessed 115 Wink Black Structure



14204030 Ring Recessed Trimless 146 1x

Choose a required accessory