

---




---



---



---

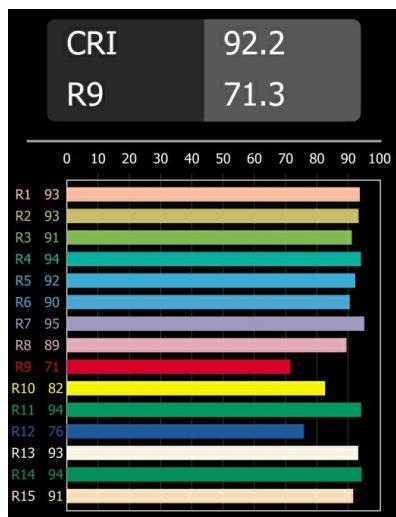
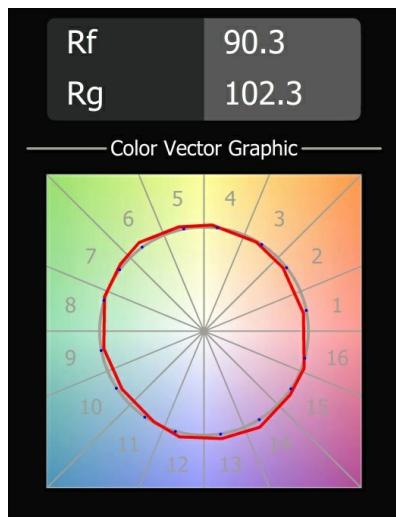
*Wink Asy Recessed 115 1x IP54 LED 3000K Spot DE Black Structure*

**Specifications**

Material	13071132		
Light Source Type	LED		
LED Type	BRIDGELUX VERO13 G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	83 99 100 100 72		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	15.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	54		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	Ø133		
Mounting depth (mm)	100.0		
Adjustability	H 355°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Black, Structure		
Gross weight (g)	871.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	28,3	29,0	29,7
Max. forward voltage (Vf)	32,9	33,6	34,5
Connected load (W)	10,7	15,7	22,5
Luminous flux per lamp (lm)	1063	1450	1897
Efficacy (lm/W)	99	92	84
Glare rating	1	1	1
Remark	• This is not a complete product. Recessed Ring		


---

or Wink Flange required.


---

**TM30 & CRI diagram**


### *Installation Accessories*



■ **13073009** Ring Recessed 115 Wink White Structure  
■ **13073032** Ring Recessed 115 Wink Black Structure



■ **14204030** Ring Recessed Trimless 146 1x

■ Choose a required accessory