

---




---



---




---


*Wink Asy Recessed 115 1x IP54 LED 2700K Medium DE White Structure*

**Specifications**

Material	13071309		
Light Source Type	LED		
LED Type	BRIDGELUX VERO13		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L80B20 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
Binning (SDCM)	3		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	46.8		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	54		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	Ø133		
Mounting depth (mm)	100.0		
Adjustability	H 355°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	871.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	29,1	29,9	31,0
Max. forward voltage (Vf)	33,7	34,7	35,8
Connected load (W)	11,0	16,2	23,4
Luminous flux per lamp (lm)	776	1023	1283
Efficacy (lm/W)	71	64	56
Glare rating	17	18	18
Remark	• This is not a complete product. Recessed Ring or Wink Flange required.		

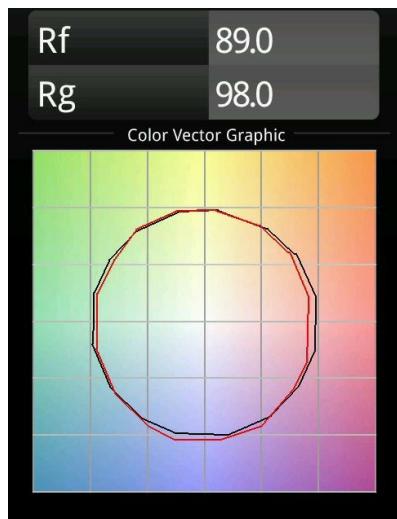


**TM30 & CRI diagram**


### *Installation Accessories*



■ **13073009** Ring Recessed 115 Wink White Structure  
■ **13073032** Ring Recessed 115 Wink Black Structure



■ **14204030** Ring Recessed Trimless 146 1x

■ Choose a required accessory