



Date
Customer
Project
Type

Wink Asy Recessed 115 1x IP54 LED 3000K Medium DE White Structure

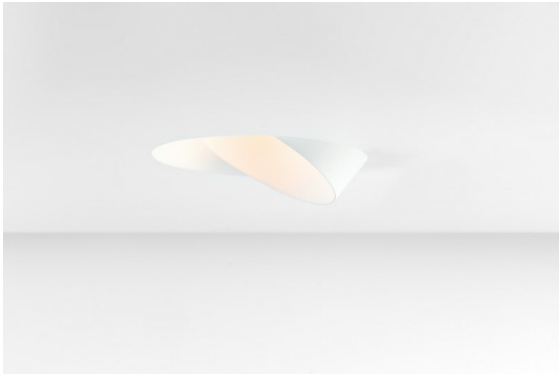

Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.

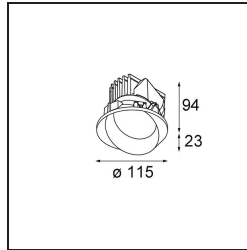

Specifications


Material	13071409		
Light Source Type	LED		
LED Type	BRIDGELUX VERO13 G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L80B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	74 96 99 100 80		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	25.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	54		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	Ø133		
Mounting depth (mm)	100.0		
Adjustability	H 355°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	871.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	28,3	29,0	29,7
Max. forward voltage (Vf)	32,9	33,6	34,5
Connected load (W)	10,7	15,7	22,5
Delivered lumens (lm)	1185	1617	2116
Efficacy (lm/W)	111	103	94
Glare rating	14	15	16
Remark	<ul style="list-style-type: none"> This is not a complete product. Recessed Ring or Wink Flange required. 		




MODULAR
LIGHTING —
INSTRUMENTS

Wink Asy Recessed 115 1x IP54 LED 3000K Medium DE White
Structure


TM30 & CRI diagram

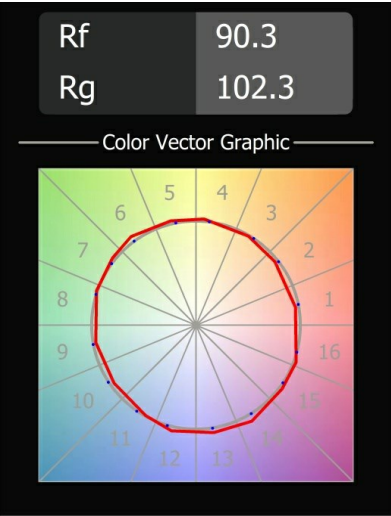

Installation Accessories

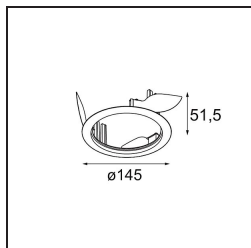

- **13073009** Ring Recessed 115 Wink White Structure
- **13073032** Ring Recessed 115 Wink Black Structure

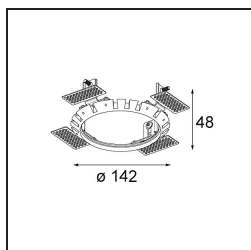

- **14204030** Ring Recessed Trimless 146 1x

■ Choose a required accessory