




Date
Customer
Project
Type

Charlatan Track 230V Adjustable 65 1x LED 3000K Trailing Edge DI White Structure





A trackspot for our 230V track rail, Charlataan is an easy choice for spaces that need change. Its unpretentious, timeless design and excellent price/quality ratio make Charlataan ideal for several spaces. A thin, adjustable bracket. A flexibility of 360° horizontal and 90° vertical. A deeper-recessed reflector for visual comfort. With Charlataan, there's no compromise on quality or technology.




Specifications

Material	13110109
Light Source Type	LED
LED Type	LUMILED 1203 GEN 4
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 80
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Input Voltage	230V
Luminaire power (W)	17.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling
Adjustability	H 359° V -90°/+90°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	687.0
Luminous flux per lamp (lm)	1329
Efficacy (lm/W)	78
Glare rating	12
Remark	<ul style="list-style-type: none">• 3500K on request• Reflector not included• 3500K on request• Reflector not included• This is not a complete product. Reflector and track 230V system required.• This is not a complete product. Reflector and track 230V system required.

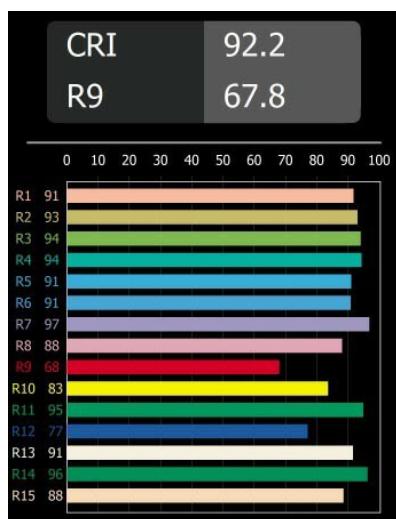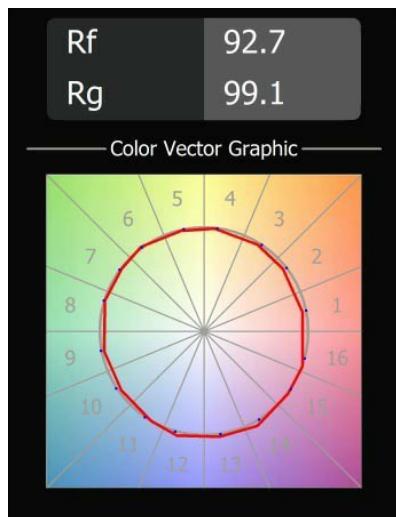TM30 & CRI diagram


Optical Accessories



- **10210002** Reflector 65 Medium Aluminium Anodised
- **10210001** Reflector 65 Spot Aluminium Anodised
- **10210003** Reflector 65 Flood Aluminium Anodised

■ Choose a required accessory