


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Charlatan Track 230V Adjustable 65 1x LED 4000K DALI DI Black Structure



A trackspot for our 230V track rail, Charlatan is an easy choice for spaces that need change. Its unpretentious, timeless design and excellent price/quality ratio make Charlatan ideal for several spaces. A thin, adjustable bracket. A flexibility of 360° horizontal and 90° vertical. A deeper-recessed reflector for visual comfort. With Charlatan, there's no compromise on quality or technology.




Specifications


| | |
|---------------------------------|--|
| Material | 13110732 |
| Light Source Type | LED |
| LED Type | LUMILED 1203 GEN 4 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 4000K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 80 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Reflector |
| Input Voltage | 230V |
| Luminaire power (W) | 17.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Adjustability | H 360° V 0°/+90° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 716.0 |
| Luminous flux per lamp (lm) | 1433 |
| Efficacy (lm/W) | 84 |
| Glare rating | 13 |
| Remark | <ul style="list-style-type: none"> • 3500K on request • Reflector not included • 3500K on request • Reflector not included • This is not a complete product. Reflector and track 230V system required. • This is not a complete product. Reflector and track 230V system required. |



TM30 & CRI diagram

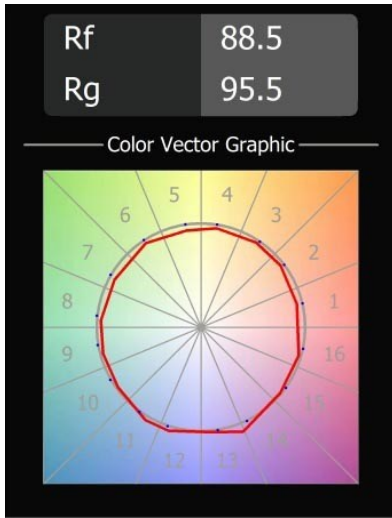

Optical Accessories



- **10210002** Reflector 65 Medium Aluminium Anodised
- **10210001** Reflector 65 Spot Aluminium Anodised
- **10210003** Reflector 65 Flood Aluminium Anodised

■ Choose a required accessory